

# TIMBER SHELVES

Finger jointed in the length, and edge glued to provide stability and strength. A great selection of species, each individually shrink wrapped with instructions included.


NEW




Prime oak



Rustic oak



Walnut




Black oak

- > 4 species
- > 40 mm shelf thickness
- > Pre-drilled for fixing with concealed shelf supports (not included)
- > Hardwood shelves are constructed from 40 mm wide, finger jointed pieces of kiln dried timber
- > Raw sanded to 150 grit and ready for finishing
- > The Ultra Work surface sealant is required to treat the wood before use enhancing the natural grain of the wood and giving it a water resistant seal - Included in the Apollo Timber installation and care set shown on page **199**
- > The colour of the wood will change over time, giving a beautiful and matured look
- > 10 Year limited manufacturer's warranty



## Timber shelves

### Square edge



### Shelves

600 x 200 x 40mm  
900 x 200 x 40mm  
1200 x 200 x 40mm

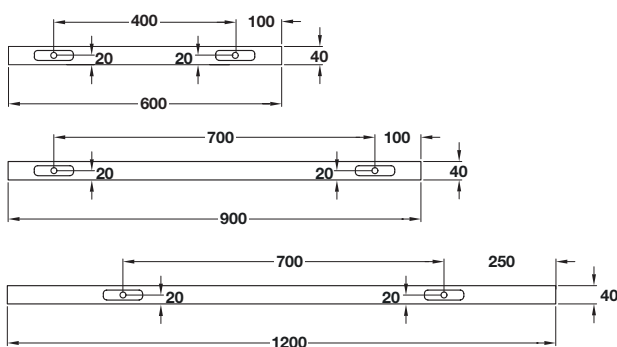

> Concealed shelf supports suitable for use with timber shelves are available to order separately: Cat. No. 283.33.904, 283.33.910, 283.33.500

> Visit [www.hafele.co.uk](http://www.hafele.co.uk) for our full range of shelf supports

### Measuring up:

- > Timber can expand as much as 1 mm/mtr. Always allow a gap of at least 3 mm if for example, worktops are captive between walls
- > Tolerance is  $\pm 2$  mm



### Installation:

- > Regular use of the care and maintenance kit should ensure shelves stay in good condition
- > Installation is relatively easy, for either a competent DIY enthusiast or recognised kitchen installer to carry out
- > Timber shelves must not be installed in unoccupied premises
- > If timber shelves are to be stored prior to installation, they should always be stored at room temperature away from all sources of heat and moisture, on a sound level surface horizontally with a minimum of four timber battens equally spaced in between each worktop and on the floor
- > Never store in a garage or an unfinished building and always install within 7 days of delivery
- > Seal regularly in the first couple of weeks after installation to avoid the shelves drying out
- > Easy to follow installation video is available to download at [www.hafele.co.uk](http://www.hafele.co.uk)

NEW

10 Year  
Warranty

## Timber shelves



Item	Prime oak	Rustic oak	Walnut	Black oak
Shelf 600 x 200 x 40 mm	564.11.941	564.11.951	564.11.971	564.11.831
Shelf 900 x 200 x 40 mm	564.11.942	564.11.952	564.11.972	564.11.832
Shelf 1200 x 200 x 40 mm	564.11.943	564.11.953	564.11.973	564.11.833

## YOU ALSO NEED:



**WOOD CARE OILS**  
Page 218



**CARE KIT**  
Page 199

### > Caring for wood:

Following installation, use Ultra Worksurface Sealant to prevent the wood from drying out and warping

- > Ultra Worksurface Sealant is a clear, satin matt finish preserver made from natural vegetable oils and waxes. Its micro porous finish will not crack, flake, peel or blister. Remember: Always wipe off all excess sealant before allowing to dry

Further coat(s) of sealant should be applied in the first few weeks following installation to prevent drying out as the worksurface acclimatises to its new environment

If your worksurface dries out apply a coat of Ultra Worksurface Sealant. Ultra Fresh Mousse is specially formulated to freshen up and clean your work surface to provide a fresh, protective layer on the surface. Its natural oils and waxes will restore the surface finish; apply at 2-3 month intervals or to seal minor repairs

- > Ultra Fresh Mousse is specially formulated to freshen up and clean your work surface to provide a fresh, protective layer on the surface. Its natural oils and waxes will restore the surface finish; apply at 2-3 month intervals or to seal minor repairs

PAGE AMENDED  
26.10.16/2