



## Cylinder key switch

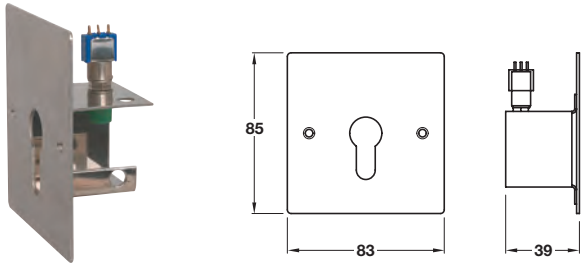


Order profile cylinder separately



- > Momentary contact
- > Normal one gang box, flush mounting
- > NO and NC contacts
- > Stainless steel faceplate
- > Order profile cylinder below separately:  
Keyed to differ, 3 keys included  
Size (AxB): 10 x 30 mm  
Matt nickel brass  
See Section 5 page 69 for full details
- > Order qty: 1 pc

Item	Cat. No.
Cylinder key switch	912.02.019
Profile cylinder	916.56.602

## AC/DC relay

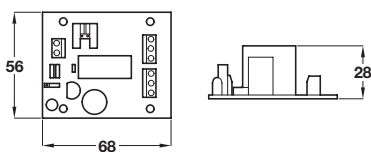

- > Double pole change over contacts
- > For use where dry contact, voltage free switching required or where there is a need for higher than usual currents and voltages to be switched
- > Operating voltage: 6-32 V AC or 7.5-30 V DC
- > Rated at:  
8 Amps at 240 V AC  
8 Amps at 30 V DC
- > Order qty: 1 pc

	Cat. No.
AC/DC relay	912.02.061