




Four sided column, double slotted on two sides

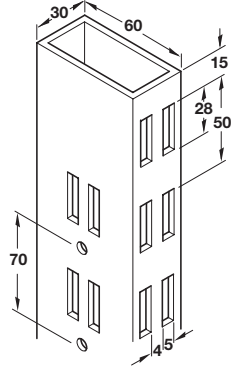

- > For use with all brackets
- > For use with column support rail
- > Plastic coated steel
- > Order qty: 1 pc

Length	Silver coloured (RAL 9006)
2115 mm	770.16.221
2515 mm	770.16.225


Tubular Insert



- > Plug fits into top or bottom of four sided 60 x 30 mm columns
- > For use with M10 ceiling screw and adjustment feet
- > Zinc alloy
- > Order qty: 1 pc

Finish	Bright
Cat. No.	770.16.292

Foot, 30 mm

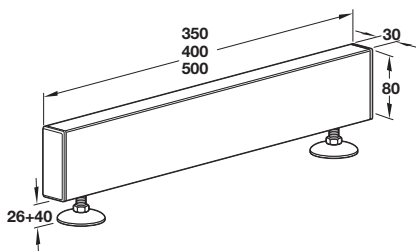

- > For use with 30 x 30 mm double slotted column and 60 x 30 mm columns
- > With adjusting screws, adjustable +40 mm
- > Plastic coated steel
- > Order qty: 1 pc

Effective depth	Silver coloured (RAL 9006)
500 mm	770.16.282