



Loox 12V LED 2026 downlight, Ø 65 mm




833.72.361 LED 2026 downlight

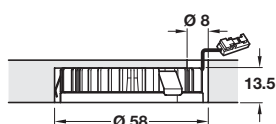

833.72.126 Recess mounting bezel, round

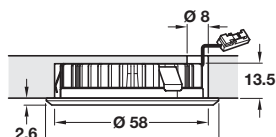

Round

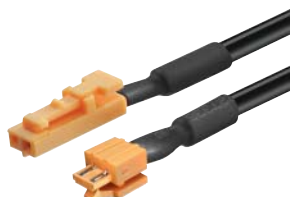


833.72.882 Connecting lead with snap in connector, 2000 mm



833.74.960 12V LED driver, 140 x 50 x 16 mm, 0-20W



833.89.080 Moulded mains plug, 5000 mm

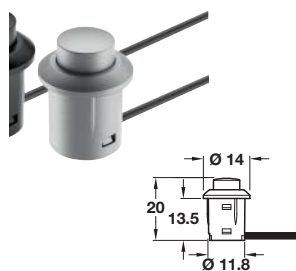

833.89.107 Push button switch, grey coloured

- > 1.5 mm rim, min. 13.5 mm hole depth required
- > For recess mounting, press-fit in Ø 58 mm hole, order bezel separately
- > For surface mounting, order bezel separately
- > Voltage: 12V. Wattage: See table below
- > Piece consists of
 - 2x 833.72.361 Downlight, Ø 65 mm
 - 2x 833.72.126 Round recess mounting bezel, silver coloured
 - 2x 833.72.882 Connecting lead with snap in connector, 2000 mm
 - 1x 833.74.960 12V LED driver, 140 x 50 x 16 mm, 0-20W
 - 1x 833.89.080 Moulded mains plug, 5000 mm
 - 1x 833.89.107 Push button switch, grey coloured
- > Silver coloured aluminium housing
- > Order qty: 1 pc

Output:	3000 K
Light colour:	Warm white
Wattage (W):	3.0
Energy efficiency:	A+
Number of diodes:	6
Light output (Lm):	210
Efficacy (Lm/W):	70
Colour Rendering Index:	90




	3000 K
LED 2026	833.71.934


Loox 12V LED 2026 downlight, Ø 65 mm



833.72.361 LED 2026 downlight

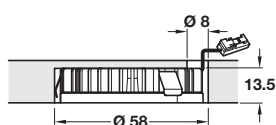

833.72.126 Recess mounting bezel, round

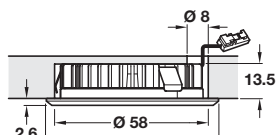

Round



833.72.882 Connecting lead with snap in connector, 2000 mm

- > 1.5 mm rim, min. 13.5 mm hole depth required
- > For recess mounting, press-fit in Ø 58 mm hole, order bezel separately
- > For surface mounting, order bezel separately
- > Voltage: 12V. Wattage: See table below
- > Piece consists of
 - 1x 833.72.361 Downlight, Ø 65 mm
 - 1x 833.72.126 Round recess mounting bezel, silver coloured
 - 1x 833.72.882 Connecting lead with snap in connector, 2000 mm
- > Silver coloured aluminium housing
- > Order qty: 1 pc

Output:	3000 K
Light colour:	Warm white
Wattage (W):	3.0
Energy efficiency:	A+
Number of diodes:	6
Light output (Lm):	210
Efficacy (Lm/W):	70
Colour Rendering Index:	90




	3000 K
LED 2026	833.71.936

Loox 12V LED 2040 downlight, Ø 40 mm



833.72.145 Recess mounting bezel, round

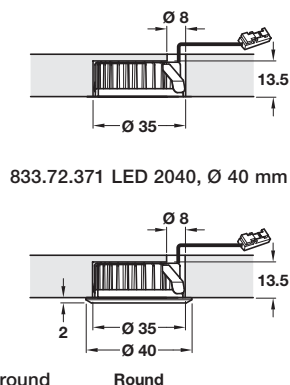

833.72.371 LED 2040, Ø 40 mm




833.72.882 Connecting lead with snap in connector, 2000 mm



833.74.960 12V LED driver, 140 x 50 x 16 mm, 0-20W




833.89.080 Moulded mains plug, 5000 mm

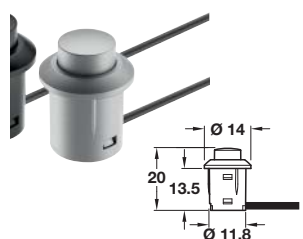

833.89.107 Push button switch, grey coloured

- > 1.5 mm rim, min. 13.5 mm hole depth required
- > For recess mounting, press-fit in Ø 35 mm hole, order bezel separately
- > For surface mounting, order bezel separately
- > Voltage: 12V. Wattage: 1.5W
- > Piece consists of
 - 4x 833.72.371 Downlight, Ø 40 mm
 - 4x 833.72.145 Round recess mounting bezel, silver coloured
 - 4x 833.72.882 Connecting lead with snap in connector, 2000 mm
 - 1x 833.74.960 12V LED driver, 140 x 50 x 16 mm, 0-20W
 - 1x 833.89.080 Moulded mains plug, 5000 mm
 - 1x 833.89.107 Push button switch, grey coloured
- > Silver coloured aluminium housing
- > Aluminium housing
- > Order qty: 1 pc

Output:	3000 K
Light colour:	Warm white
Wattage (W):	1.5
Energy efficiency:	A+
Number of diodes:	3
Light output (Lm):	88
Efficacy (Lm/W):	59
Colour Rendering Index:	90




Finish	3000 K
Silver coloured	833.71.935


Loox 12V LED 2040 downlight, Ø 40 mm



833.72.145 Recess mounting bezel, round

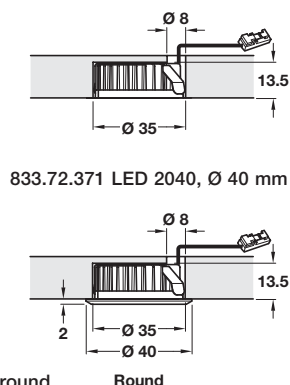


833.72.371 LED 2040, Ø 40 mm

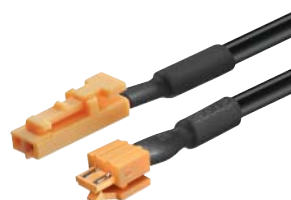

833.72.882 Connecting lead with snap in connector, 2000 mm

- > 1.5 mm rim, min. 13.5 mm hole depth required
- > For recess mounting, press-fit in Ø 35 mm hole, order bezel separately
- > For surface mounting, order bezel separately
- > Voltage: 12V. Wattage: 1.5W
- > Piece consists of
 - 1x 833.72.371 Downlight, Ø 40 mm
 - 1x 833.72.145 Round recess mounting bezel, silver coloured
 - 1x 833.72.882 Connecting lead with snap in connector, 2000 mm
- > Silver coloured aluminium housing
- > Aluminium housing
- > Order qty: 1 pc

Output:	3000 K
Light colour:	Warm white
Wattage (W):	1.5
Energy efficiency:	A+
Number of diodes:	3
Light output (Lm):	88
Efficacy (Lm/W):	59
Colour Rendering Index:	90



Finish	3000 K
Silver coloured	833.71.937