

Overhead door closer EN2-4 with semi-radius cover





Satin stainless steel



Silver sprayed



Matt black

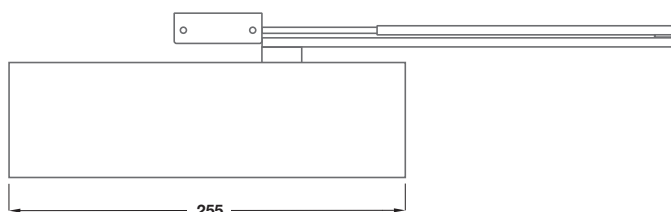

- > Power size 2-4 (power adjustable by spring)
- > Max. door width 1100 mm (Fig. 1 EN2-4)
- > Max. door width 1100 mm (Fig. 6 EN3-4)
- > Adjustable closing speed and latch action with backcheck
- > Cast body rack and pinion mechanism with flat form armset
- > Fig 1 pull face, Fig 6. (parallel arm) push side and Fig 61 approved
- > CE marked and Certifire accredited CF 5294
- > Tested in accordance with BS EN 1634:1 - suitable for up to 2 hours on timber door sets
- > Tested in accordance with BS EN 1154:1996
- > Aluminium body, mild steel arm
- > Cover: satin stainless finish in genuine stainless steel, semi radius design
- > Order qty: 1 pc



EN 1634-1 is tested on timber intumescent sealed door assemblies and has a fire resistance of up to 120 minutes
Not approved for use on steel fire doors

BS EN 1154

3 8 4-2 1 1 4





Finish	Cat. No.
Satin stainless steel	931.31.003
Silver sprayed	931.31.004
Matt black	931.31.005

Overhead door closer EN2-5 with semi-radius cover



Satin stainless steel

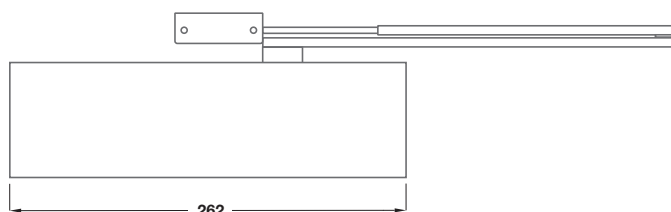

- > Power size 2-5 mechanism (power adjustable by spring)
- > Max. door width 1250 mm (Fig. 1 EN2-5)
- > Max. door width 1100 mm (Fig. 6 EN3-4)
- > Adjustable closing speed and latch action with backcheck
- > Extruded body rack and pinion mechanism with flat form armset
- > Only Fig 1 pull face and Fig 6. (parallel arm) push side approved
- > CE marked and Certifire accredited CF 5294
- > Tested in accordance with BS EN 1634:1 - suitable for up to 2 hours on timber door sets
- > Tested in accordance with BS EN 1154:1996
- > Capable of meeting opening force requirements for BS8300
- > Aluminium body, mild steel arm, semi radius design
- > Order qty: 1 pc



EN 1634-1 is tested on timber intumescent sealed door assemblies and has a fire resistance of up to 120 minutes
Not approved for use on steel fire doors

BS EN 1154 (Fig. 1)

4 8 5-2 1 1 4

BS EN 1154 (Fig. 6)

3 8 4-3 1 1 4



Finish	Cat. No.
Silver sprayed	931.31.006
Satin stainless steel	931.31.007
Matt black	931.31.008