


IXCONNECT MINIFIX 15 METAL HOUSINGS




- Drill hole Ø** = Ø 15 mm for housings
- Drilling depth X** = depends on type of housing and wood thickness (see order columns for details)
- Drilling distance B** = choice of B 24 (24 mm) or B 34 (34 mm) drilling distance from drill-hole centre to panel front edge
- Bolt drill hole Ø** = Ø 7 or Ø 8 mm in panel front edge according to choice of connecting bolt

Minifix 15 housing, without rim

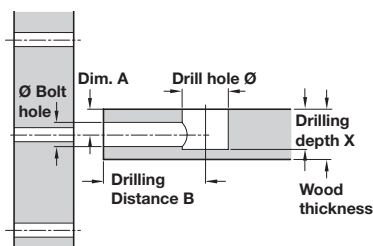

- > For wood thickness from 12 mm
- > Drive: PZ2 cross slot or flat blade
- > Zinc alloy
- > Order qty: Multiples of 100 pcs




For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated
12 mm	6.0 mm	9.5 ^{+0.2} mm	262.26.070	262.26.570

Minifix 15 housing, without rim



- > For wood thicknesses from 13 mm
- > Drive: PZ2 cross slot or flat blade
- > Zinc alloy
- > Order qty: Multiples of 100 pcs




For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated
13 mm	6.5 mm	11.0 ^{+0.2} mm	262.26.031	262.26.531

Minifix 15 housing, without rim



- > For wood thicknesses from 15, 16, 18 or 19 mm
- > Drive: PZ2 cross slot, flat blade or SW4 hexagon socket
- > Zinc alloy
- > Order qty: Multiples of 100 pcs



For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated	Nickel coloured
15 mm	7.5 mm	12.0 ^{+0.5} mm	262.26.032	262.26.532	262.26.132
16 mm	8.0 mm	12.5 ^{+0.5} mm	262.26.033	262.26.533	262.26.133
18 mm	9.0 mm	13.5 ^{+0.5} mm	262.26.034	262.26.534	-
19 mm	9.5 mm	14.0 ^{+0.5} mm	262.26.035	262.26.535	-



- > Minifix 15 connecting bolts, suitable for these zinc alloy housings are shown on pages **7.17-24**
- > Red jig for Minifix 12 and 15 housings are shown on **7.44-50**
- > Unitool drilling jig for Minifix 12 and 15 housings can be found on page **7.52-53**
- > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page **7.45**
- > Minifix 15 cover caps shown on page **7.16**