

HAWA-FOLDING CONCEPTA III 20/25 PULL AND PUSH

Folding and pivot sliding system for bi-folding cabinet pocket doors. Flush cabinet fronts can be fully opened from end to end to give complete access to cabinet contents but are also completely concealed once doors are opened.

- > Based on the HAWA-Concepta the system is for bi-folding pocket doors
- > Two pairs of folding doors enable cabinet fronts to be stored in the cabinet, fully flush with the external side
- > Opened: free access to the entire cabinet front
- > Closed: flush with the adjacent areas
- > Left and right hand sets available
- > With soft closing mechanism for front panels with handles (Pull), or with push-to-open for front panels without handles (Push)

> Range:

Max. door weight **20/25 kg** (per pair of panels 40/50 kg)

Door width **440-750 mm**

Door height **≤20 kg: 1200-2200 mm**

≤25 kg: 1900-2700 mm

Door thicknesses **18-26 mm**


- > Also available in a **black** finish, please contact technicalsupport@hafele.co.uk for further information

- > Ensure accuracy in design and product selection by using the **Hawa configurator**


<https://configurator.hawa.com/configurator/product-selector.html>





Calculation of the fitting depth and the door leaf

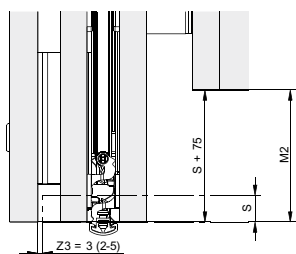


Retracted door leaf flush with the outside

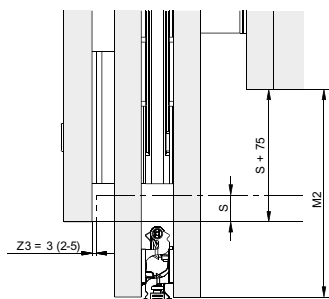

Retracted door leaf protruding

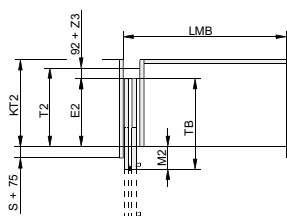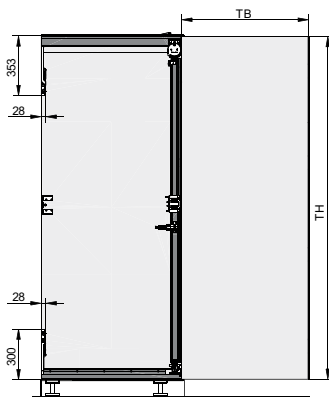

Application examples

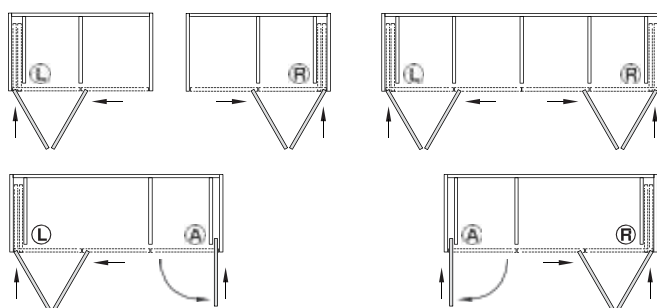

Cabinet versions with 1-4 doors,

L = left hand set, R = right hand set, A = Hawa Concepta III

E2	Retraction distance	TB - M2
EH	Installation height	
KT2	Cabinet depth	≥ T2
LMB	Internal cabinet width	
M2	Door handle spacing	TB - E2
	Retracted door leaf flush	≥ S + 75
	Retracted door leaf protruding	≤ TB - 390
S	Door thickness	18-26 mm
T2	Hardware depth	TB + 92 mm + Z3 - M2, ≥ 344 mm
TB	Door width	440-750 mm
TH	Door height	
Z	Gap	Z1/Z2 gap at top/bottom, Z3/Z4 gap at side Z5 gap between 2 door leaves




Door straighteners are recommended to be used with HAWA-Concepta to add rigidity to wooden doors. These must be ordered separately, shown on pages **1.142-1.147A**

Installation examples


1

Doors opening without floor profile, 2 and 4-door

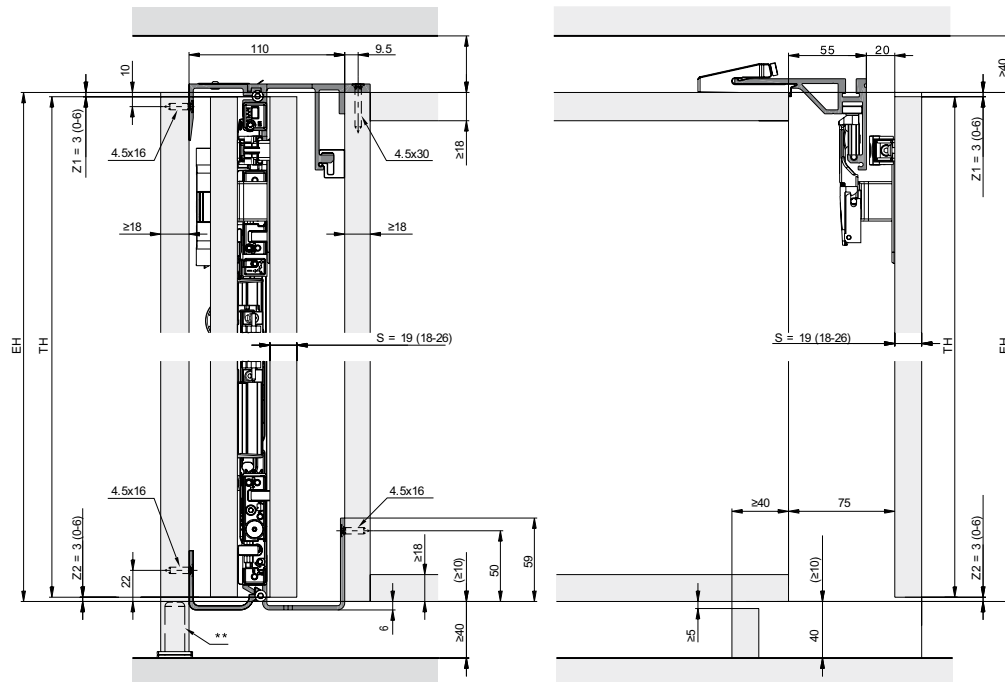

* Include adjusting foot

Doors opening with floor profile, 2 and 4-door

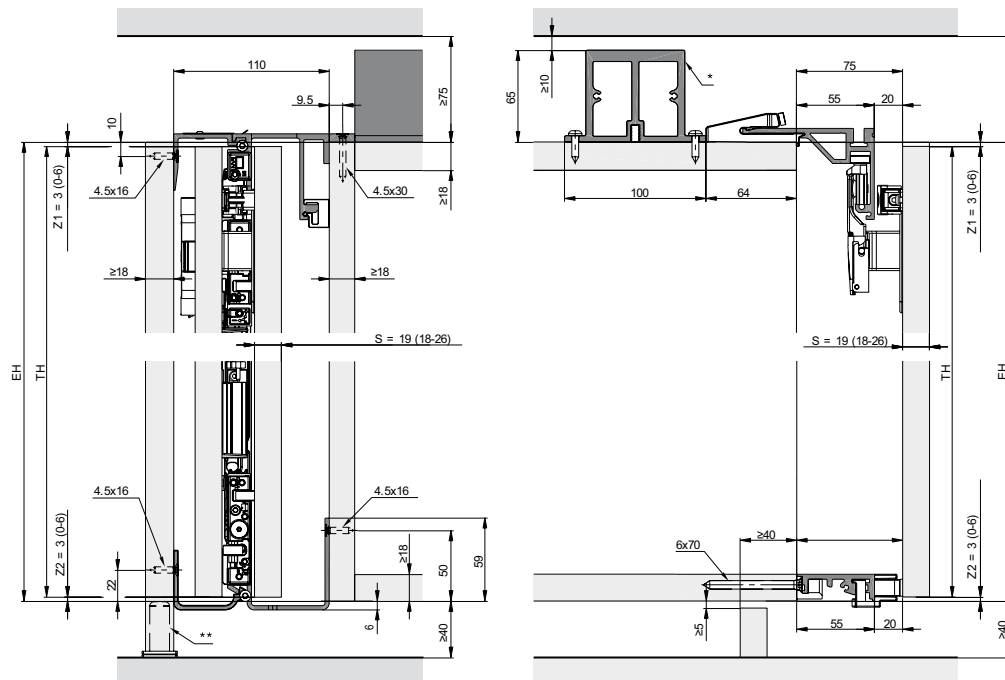

* Strengthening profile for 3 and 4-door systems without centre panels

** Include adjusting foot