



# IXCONNECT MINIFIX 15 METAL HOUSINGS

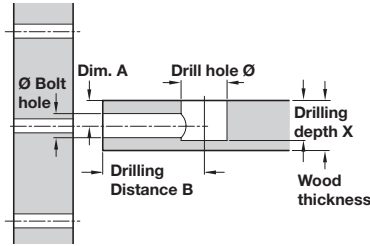

- Drill hole Ø** = Ø 15 mm for housings
- Drilling depth X** = depends on type of housing and wood thickness (see order columns for details)
- Drilling distance B** = choice of B 24 (24 mm) or B 34 (34 mm) drilling distance from drill-hole centre to panel front edge
- Bolt drill hole Ø** = Ø 7 or Ø 8 mm in panel front edge according to choice of connecting bolt


## Minifix 15 housing, without rim



- > For wood thickness from 12 mm
- > Drive: PZ2 cross slot or flat blade
- > Zinc alloy
- > Order qty: Multiples of 100 pcs

For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated
12 mm	6.0 mm	9.5 <sup>+0.2</sup> mm	262.26.070	262.26.570


## Minifix 15 housing, without rim



- > For wood thicknesses from 13 mm
- > Drive: PZ2 cross slot or flat blade
- > Zinc alloy
- > Order qty: Multiples of 100 pcs

For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated	Nickel coloured
13 mm	6.5 mm	11.0 <sup>+0.2</sup> mm	262.26.031	262.26.531	262.26.131


## Minifix 15 housing, without rim



- > For wood thicknesses from 15, 16, 18 or 19 mm
- > Drive: PZ2 cross slot, flat blade or SW4 hexagon socket
- > Zinc alloy
- > Order qty: Multiples of 100 pcs

For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated	Black	Nickel coloured
15 mm	7.5 mm	12.0 <sup>+0.5</sup> mm	262.26.032	262.26.532	262.26.332	262.26.132
16 mm	8.0 mm	12.5 <sup>+0.5</sup> mm	262.26.033	262.26.533	262.26.333	262.26.133
18 mm	9.0 mm	13.5 <sup>+0.5</sup> mm	262.26.034	262.26.534	262.26.334	262.26.134
19 mm	9.5 mm	14.0 <sup>+0.5</sup> mm	262.26.035	262.26.535	262.26.335	262.26.135

## Minifix 15 housing, without rim



- > For wood thicknesses from 23, 26 or 29 mm
- > Drive: PZ2, PZ3 cross slot, flat blade or SW4 hexagon socket
- > Zinc alloy
- > Order qty: Multiples of 100 pcs

For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated
23 mm	11.5 mm	16.5 <sup>+0.5</sup> mm	262.26.264	262.26.666
26 mm	13.0 mm	18.0 <sup>+0.5</sup> mm	262.26.270	262.26.670
29 mm	14.5 mm	19.5 <sup>+0.5</sup> mm	262.26.291	262.26.693

COMPONENTS, FIXINGS AND CONSUMABLES 2014, © Häfele U.K. Ltd 2014. Dimensional data not binding. We reserve the right to alter specifications without notice.