


# EKU-COMBINO 45 GR FS SLIDING GLASS DOOR SYSTEM


For two or three straight sliding aluminium framed doors. High quality sliding door system for large wardrobe and cabinet doors, suitable for residential and commercial applications such as hotel rooms.

- > EKU-COMBINO 45 GR Forslide
- > Range:
  - Maximum door weight **45 kg**
  - For **4 mm** glass thickness
  - Max. door width **1400 mm**
  - Max. door height **2400 mm**
- > Height adjustment +4/-2 mm on running gear
- > Simple construction of aluminium frame door
- > For glass doors: Cut profiles to mitre, assemble with frame fixing angles and fasten with screws
- > EKU soft close system can be ordered separately, shown on pages **208-209**

Door overlap

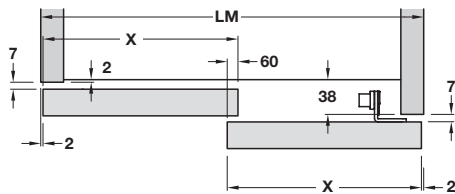





$$\text{Door width} = (LM + 56) / 2$$

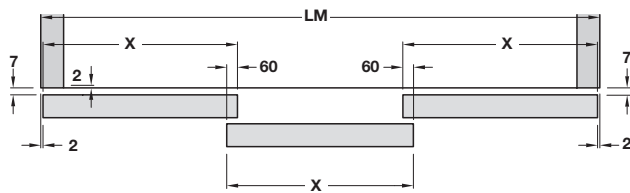

$$\text{Door width} = (LM + 116) / 3$$


X = Door width, LM = Total width

Drilling diagram

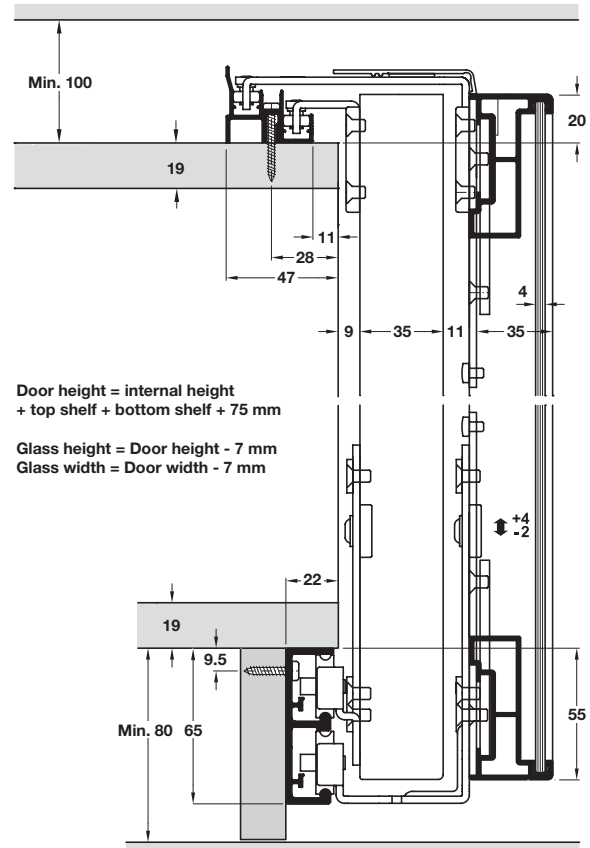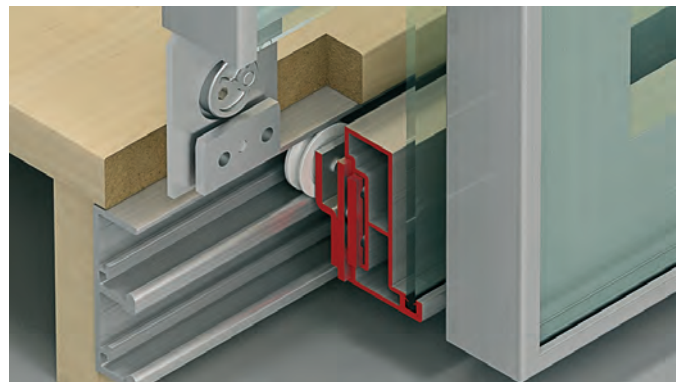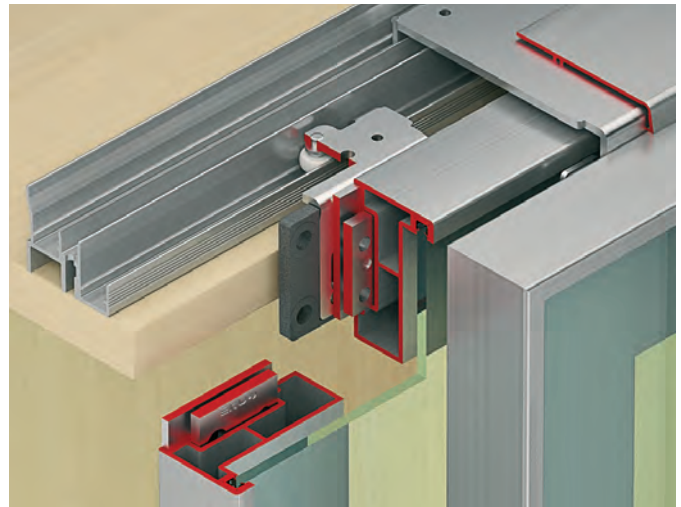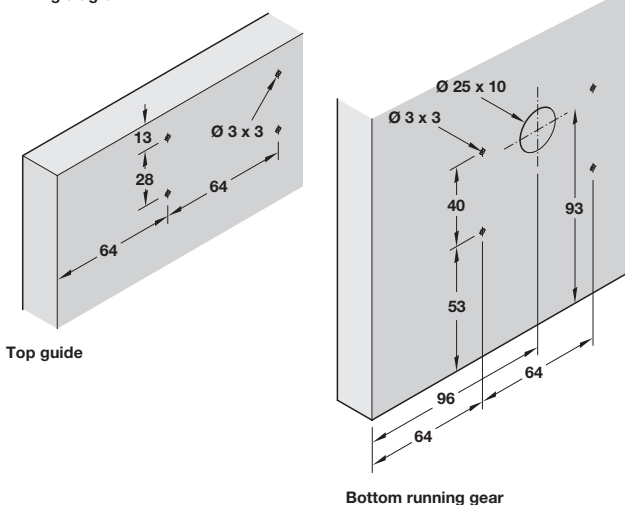

> Tracks, rails, profiles and fitting sets must be ordered separately, shown on page **103**

## EKU Combino 45 GR Forslide tracks and profiles

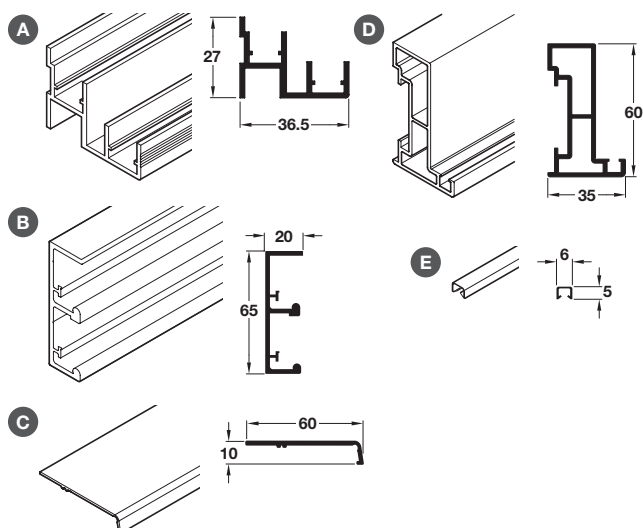


> Order tracks separately

- A Dual top guide track, screw fixing, bright aluminium
- B Double guide rail, screw fixing, anodised aluminium
- C Cover profile, clip on, anodised aluminium
- D Frame profile, screw fixing, anodised aluminium
- E Glass fixing profile, grey plastic

> Order qty: 1 pc

Item	2.5 m	3.5 m
A Dual top guide track	405.52.025	405.52.035
B Double guide rail	406.31.922	406.31.923
C Cover profile	406.31.912	406.31.913
D Frame profile	401.56.925	401.56.935
E Glass fixing profile	401.65.525	-

## EKU Combino 45 GR Forslide fitting sets

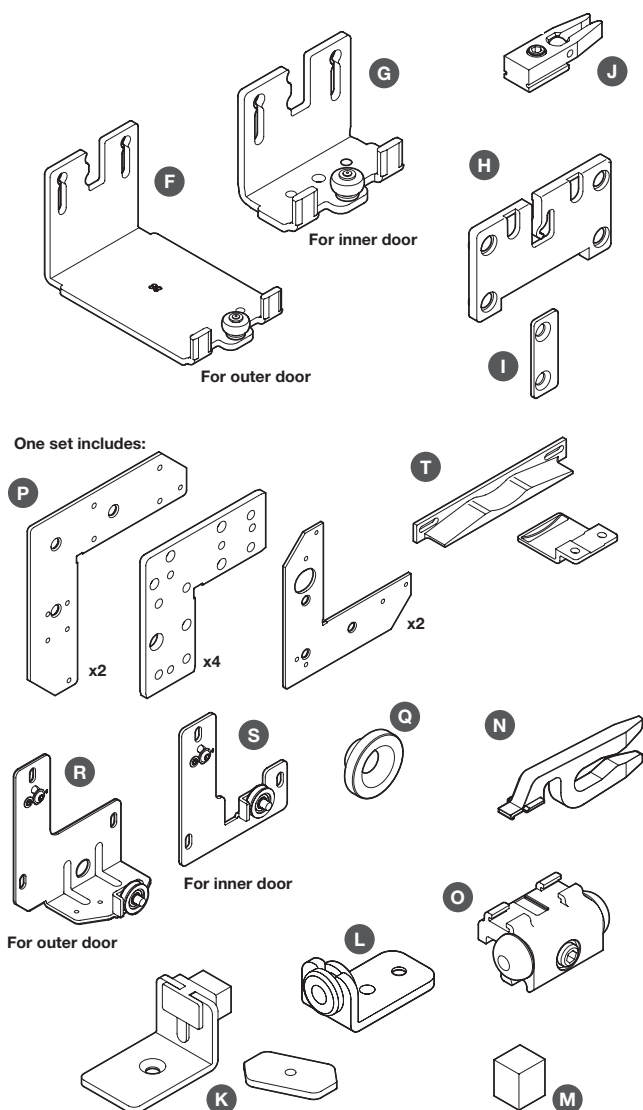

> Fitting set consists of:

- F Top guide, for outer door, galvanized steel
- G Top guide, for inner door, galvanized steel
- H Mounting fixing plate, for inner and outer doors, anthracite grey plastic
- I Fixing plate, for mounting top guide to outer door, anthracite grey plastic
- J Guide stopper, for top track, grey plastic
- K Door buffer, screw fixing, with plate, galvanized steel, grey plastic with foam buffer
- L Door buffer, for third door, grey plastic with black rubber buffer
- M Buffer, for centre door, grey foam
- N Track stopper, for bottom running track, grey plastic
- O Buffer, for bottom running track, grey plastic with grey rubber buffer
- P Frame mounting angle set, for frame door, galvanized steel
- Q Centering disc, for frame angles, white plastic
- R Bottom roller for outer door, galvanized steel
- S Bottom roller for inner door, galvanized steel
- > Additional items, order separately
- T Intermediate stop, screw fixing, grey plastic



Fitting set	For 2 doors	For 3 doors
F Top guide	2 pcs	2 pcs
G Top guide	2 pcs	4 pcs
H Mounting fixing plate	4 pcs	6 pcs
I Fixing plate	4 pcs	4 pcs
J Guide stopper	4 pcs	4 pcs
K Door buffer	1 pc	-
L Door buffer	-	2 pcs
M Buffer	-	3 pcs
N Track stopper	2 pcs	3 pcs
O Buffer	4 pcs	4 pcs
P Frame mounting angle set	2 sets	3 sets
Q Centering disc	12 pcs	18 pcs
R Bottom roller	1 pair	1 pair
S Bottom roller	1 pair	2 pairs
Fitting sets	405.91.262	405.91.263
Additional fittings	Order qty.	For 3 doors
T Intermediate stop	1 pc	405.93.020



> EKU soft close system can be ordered separately, shown on pages 208-209