EKU-COMBINO 45 GR MS SLIDING GLASS DOOR SYSTEM

For 2 or 3 straight sliding interior doors. High quality sliding system for large wardrobe and cabinet doors, suitable for residential and commercial applications such as hotels, offices etc.

- > EKU-COMBINO 45 GR Mixslide
- > Range:

Max. door weight 45 kg


For **4 mm** glass thickness

Max. door height 2400 mm


Max. door width 2400 mm

- > Height adjustment +4/-2 mm
- > EKU soft close system can be ordered separately, shown on pages **34-35**

Door overlap



Door width = (LM+56)/2




Door width = (LM+116)/3


X = Door width, LM = Total width


Guide and running gear R5 12 70 70

Top guide

> Tracks, rails, profiles and fitting sets must be ordered separately, shown on page **105**







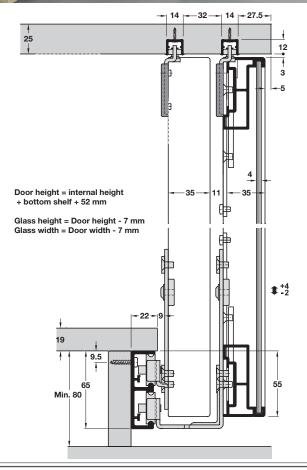



EKU Combino 45 GR Mixslide tracks and profiles








- > Order tracks and profiles separately
- A Single guide track, pre-drilled for screw fixing, anodised aluminium
- B Double guide rail, pre-drilled for screw fixing, anodised aluminium
- C Frame profile, screw fixing, anodised aluminium
- D Glass fixing profile, grey plastic


Item	2.5 m	3.5 m
A Single guide track	405.30.025	405.30.035
B Double guide rail	406.31.922	406.31.923
C Frame profile	401.56.925	401.56.935
D Glass fixing profile	401.65.525	-

EKU Combino 45 GR Mixslide fitting sets









- > Fitting set consists of:
- E Top guide for inner and outer doors, galvanized steel
- F Mounting fixing plate for inner and outer doors, anthracite grey plastic
- G Guide stopper for top track, grey plastic
- H Track end piece for top track, grey plastic
- I Track end piece for top track, grey plastic
- J Door buffer, screw fixing, with plate, galvanized steel, grey plastic with foam buffer
- K Door buffer, for third door, grey plastic with black rubber buffer
- L Buffer for centre door, grey foam
- M Track stopper for bottom running track, grey plastic
- N Buffer for bottom running track, grey plastic with grey rubber
- O Frame mounting angle for inner and outer doors, galvanized steel
- P Centering disc, white plastic
- Q Bottom roller for outer door, galvanized steel
- R Bottom roller for inner door, galvanized steel
- > Additional items, order separately
- S Intermediate stop, screw fixing, grey plastic



Item	For 2 doors	For 3 doors
E Top guide	4 pcs	6 pcs
F Mounting fixing plate	4 pcs	6 pcs
G Guide stopper	4 pcs	4 pcs
H Track end piece	3 pcs	4 pcs
I Track end piece	1 pc	-
J Door buffer	1 pc	-
K Door buffer	-	2 pcs
L Buffer	-	3 pcs
M Track stopper	2 pcs	3 pcs
N Buffer	4 pcs	4 pcs
O Frame mounting angle	2 sets	3 sets
P Centering disc	12 pcs	18 pcs
Q Bottom roller	1 pair	1 pair
R Bottom roller	1 pair	2 pairs
Fitting sets	405.91.462	405.91.463
Additional items	Order qty.	For 3 doors
S Intermediate stop	1 pc	405.93.020

PAGE AMENDED 19.07.18/1

TCH AH 2016, © Häfele U.K. Ltd 2016. Dimensional data not binding. We reserve the right to alter specifications without notice.