


Loadpro heavy duty Egress/Easy clean friction hinge, for side hung windows



- > Unhanded
- > Allows specifiers and fabricators to conform to BS 5588 Part 1: 1990 and current UK building regulations
- > Hinge quickly provides the minimum required opening of 550 mm wide x 850 mm high with simple one-handed operation in accordance with BS 5588
- > Easy Clean is operated by the simple action of opening the vent to its fullest extent at 90°, releases both top and bottom catches. In this position the window is safe, and can be eased along the track to facilitate cleaning the outside face
- > While cleaning, the hinge remains safe and stable due to a design feature that locks the two sliding mechanisms
- > An integral riser pad makes closing much easier
- > Window labels providing operating instructions are supplied
- > One size only
- > Stay parts: Ferritic stainless steel grade 430
- > Friction slide: Glass-filled nylon
- > Adjustment screws: Brass
- > Order qty: 1 pair

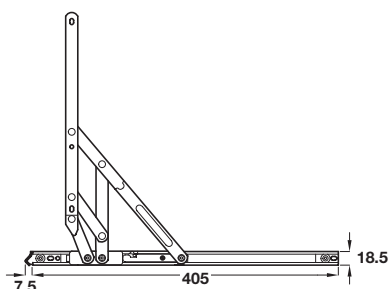

Size	Maximum vent width	Maximum vent height	Opening weight	Opening angle	Cat. No.
For side hung windows					
406 mm (16")	800 mm	1250 mm	35kg	90°	911.59.150


RELATED PRODUCTS



Broad style hinge, copper finish 64 x 35 mm

On trend copper finish on a high quality UK manufactured cabinet hinge.


- > Product shown is **354.19.925**
- > For full details see **Section 3** page **56**



Twist lever handles, grade 316 stainless steel

A twist on a design for a lever handle on our UK manufactured grade 316 stainless steel.

- > Product shown is **902.21.617**
- > For full details see **Section 1** page **5**



Twist pull handle, bolt through fixing, grade 316 stainless steel

Complimentary pull handle to complete a new twist of design for your door.

- > Product shown is **903.06.867**
- > For full details see **Section 1** page **132**