

SLIDO CLASSIC 160-B POCKET DOOR SYSTEM

High quality internal straight sliding door gear for residential and commercial applications. The unique design allows doors up to 55 mm thick to be installed with a finished wall of 100 mm, can be cut to suit standard UK door sizes or large custom doors.


- > Slido Classic 160-B
- > Range:
 - Max. door weight: **160 kg** (80 kg with soft close)
 - Max. door height: **2100 mm**
 - Max. door width **1026 mm**
 - For door thicknesses **30-55 mm**
- > Allows doors up to 55 mm thick to be installed with a finished wall of 100 mm
- > The kit can easily be cut to suit standard UK door sizes or large custom doors with the universal kit
- > Supplied as a kit to create the pocket, once cut this can be assembled in 10-20 minutes by a skilled installer
- > Finish jambs are normally made by the door installer, but kits are available on request
- > For single doors only, for bi-parting doors please contact us.



Additional items to order separately, as required

- Soft close mechanism, shown on page **96**
- Self closing set, shown on page **96**
- Synchro set, shown on page **96**
- Jointing kit, shown below
- Pocket door glass clamp set, shown below

Slido Optimo 80 / Classic 160-B jointing set

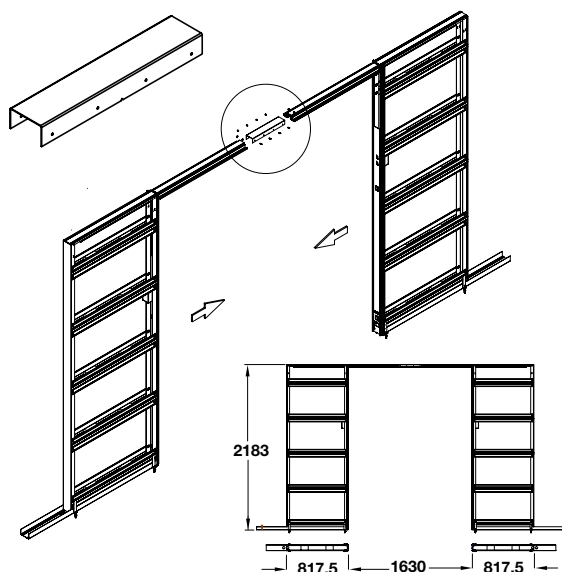

- > For use with either Slido Optimo 80 or Slido Classic 160-B sets for double door bi-parting applications
- > Aluminium
- > Order qty: 1 set



	Cat. No.
Jointing set	405.48.400

Slido Optimo 80 / Classic 160-B glass clamp set




- > For use with either Slido Optimo 80 or Slido Classic 160-B sets for frameless 10-12 mm glass doors
- > Set includes:
 - 2x Clamps, aluminium
 - 1x Bottom guide, plastic
- > Order qty: 1 set



	Cat. No.
Glass clamp set	405.49.400

Slido Classic 160-B sliding door fitting set

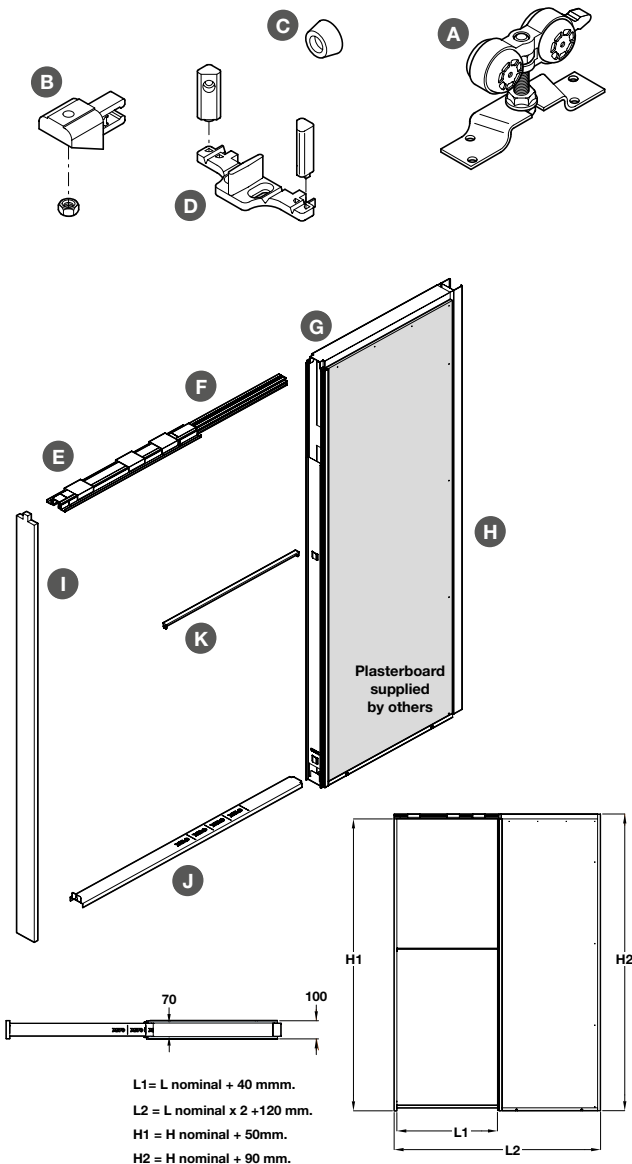

! The rigidity of the pocket wall will be improved when the interior finish kit, shown on this page, is installed. For maximum wall rigidity please use the interior finish kit shown below.


> Slido Classic 160-B sliding door fitting set consists of:

- A Trolley hanger, for sliding door, bracket length 102 mm, aluminium/plastic
 - B Track stopper, 23 x 25 x 48 mm, aluminium
 - C Door buffer, Ø 19 mm, screw fixing, rubber
 - D Floor guide, 34 x 30 x 81 mm, floor mounted or side mounted, plastic
 - E Top rail and track, marked for cut to UK door size, aluminium
 - F Top profile, marked for cut to UK door size, aluminium
 - G Studwork mounting, aluminium
 - H Rear pillar, aluminium
 - I Front profile, aluminium
 - J Floor installation profile, aluminium
 - K Centre installation profile, aluminium
- > Order qty: 1 set



Fitting set	For 1 door
A Trolley hanger	2 pcs
B Track stopper	1 pc
C Door buffer	1 pc
D Floor guide	1 pc
E Top rail and track	1 pc
F Top profile	1 pc
G Studwork mounting	2 pcs
H Rear pillar	1 pc
I Front profile	1 pc
J Floor installation profile	1 pc
K Centre installation profile	1 pc
Suits 1981 mm height doors (Width 686/762/838/926 mm)	984.42.005
Suits regular 2040 mm height doors (Width 626/726/826 mm)	984.42.006
Suits large 2040 mm height doors (Width 926/1026 mm)	984.42.007
Universal kit suits doors up to 2100 x 1000 mm cut to 2100 and 600 mm max.	984.42.008

Interior and exterior pocket finishing kits - Tanganika

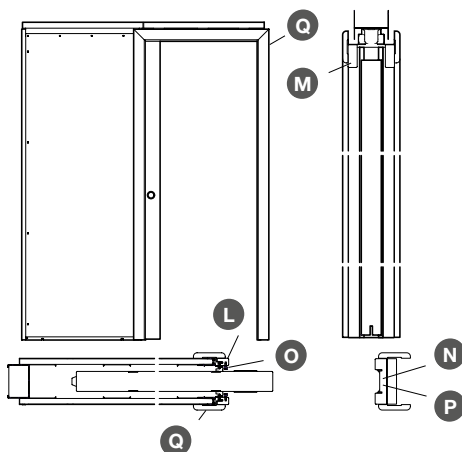

> Interior finishing set consists of:

- 2x L Edge jambs - 2100 mm for fixing to pocket
- 1x M Pelmet - 2100 mm cut for use either side
- 1x N Closing jamb - 2100 mm
- 1x O Brush seal - white, 4200 mm for fitting into L
- 1x P Rubber gaskets - 4200 mm for item N

> Exterior finishing set consists of:

- 5x Q Architrave - 2100 mm to fit around door on both sides

> Can be painted or stained as required

> Order qty: 1 set



	Cat. No.
Interior finishing kit	984.42.009
Exterior finishing kit	984.42.010