
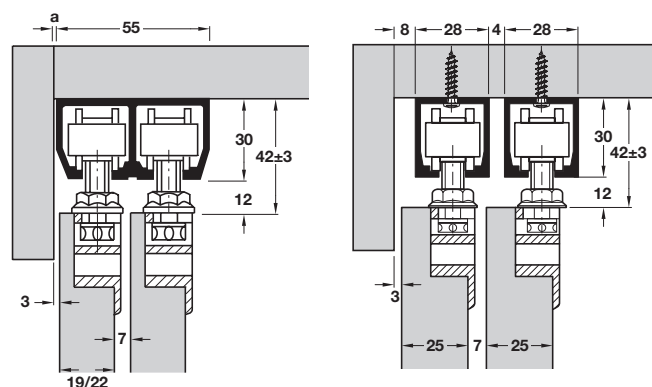
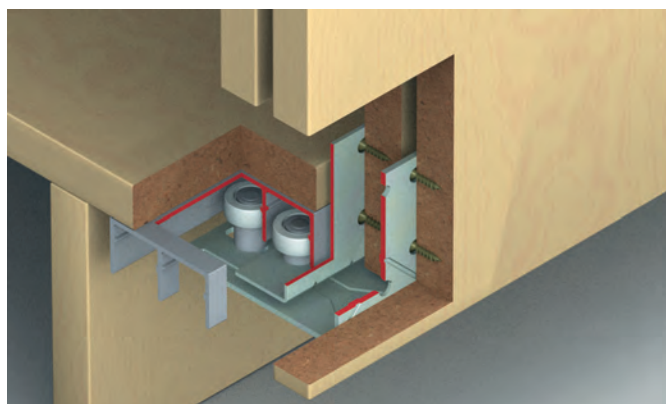



HAWA-DORADO MIXFRONT SLIDING DOOR SYSTEM

Sliding door system for top quality joinery and furniture where robust concealed bottom control required.

- > HAWA-Dorado Mixfront
- > Range:
 - Max. door weight **40 kg**
 - Door thickness **19-25 mm** only
- > With screw fixing running gear
- > For 19-22 mm thick doors use double track A
- > For 23-25 mm thick doors, two single top tracks B should be installed side by side
- > For multiple door layouts, order as follows:
 - 4 doors: 2 sets of 2 door fittings
 - 5 doors: 1 set each of 2 and 3 door fittings
- > Running gear with back fixing plate. For door weights upto 40 kg. Vertically adjustable ± 3 mm. Two white plastic friction bearing mounted tandem runner assemblies
- > Each fitting set comes complete with installation drawing ref. 17658, available separately on request

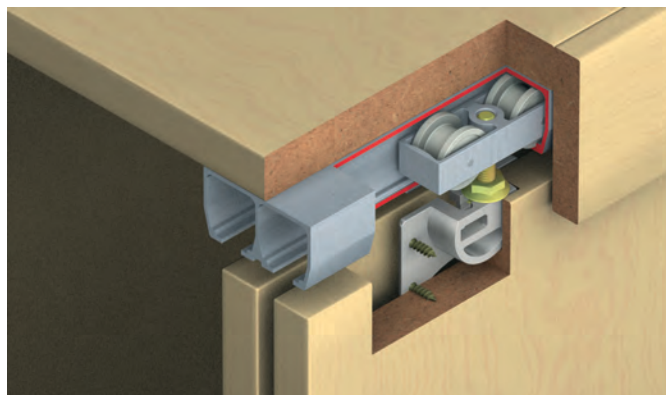


Door thickness	19 mm	22 mm
Dim. a	1.5 mm	6 mm

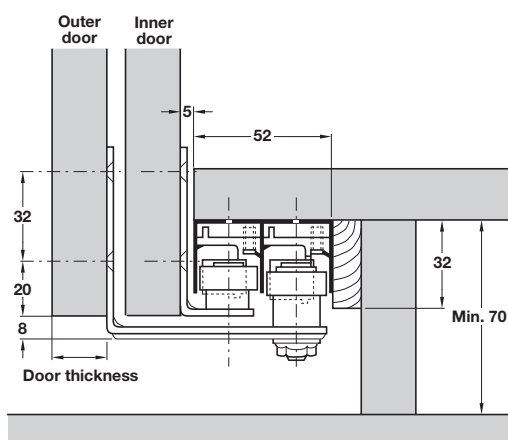

Tracks, channel and fitting sets must be ordered separately, shown on page 17


HAWA-Dorado Mixfront tracks and channels

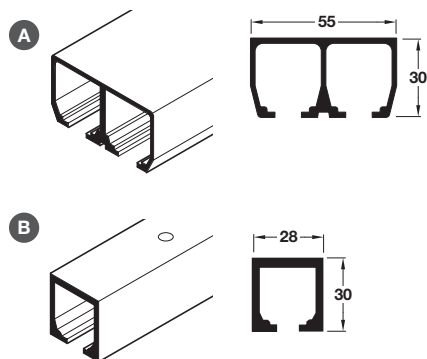

- > Order tracks separately, surface mounted
- A Double top track, pre-drilled for screw mounting, silver anodised aluminium
- B Junior 40 single top track, alternative to top track A, silver anodised aluminium
- > Order qty: 1 pc

Item	2.5 m	3.0 m	3.5 m
A Double top track	406.71.912	-	406.71.921
B Junior 40 single top track	-	940.40.300	-

HAWA-Dorado Mixfront fitting sets for 2 or 3 doors

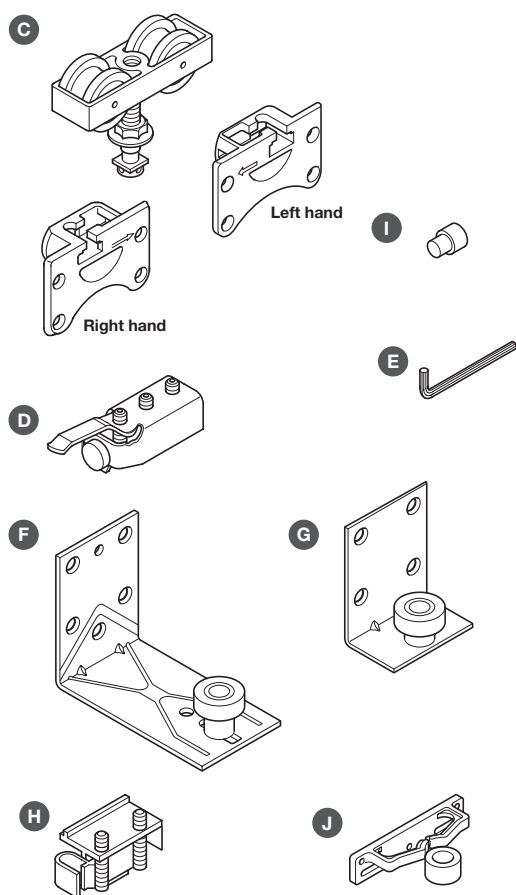


- > Fitting set consists of:
- C Trolley hanger, left/right hand for inner or outer doors, adjustable, nickel-plated zinc alloy
- D Track stopper, for inner and outer doors adjustable steel spring and retainer, 18 x 84 x 21 mm, bright zinc alloy
- E Allen key, for use to secure track stopper E in twin track, steel
- F Guide, for outer doors, screw fixing, adjustable plastic guide roller, galvanized steel
- G Guide, for inner doors screw fixing, plastic guide roller, galvanized steel
- H Guide stopper, for installation in guide channel, adjustable, 26 x 43 mm, bright aluminium
- I Rubber buffer, Ø 15 mm recess mounted in edge of door in Ø 10 mm hole, light grey rubber
- > Order qty: 1 set
- > Additional items to order separately
- J Centre door stopper, allows outer door to slide in either direction, 20 x 95 x 27 mm white plastic
- > Order qty: 1 pc per 3 door application

Item	For 2 doors	For 3 doors
C Trolley hanger, right hand	2 pcs	3 pcs
C Trolley hanger, left hand	2 pcs	3 pcs
D Track stopper	4 pcs	4 pcs
E Allen key	1 pc	1 pc
F Guide	2 pcs	2 pcs
G Guide	2 pcs	4 pcs
H Guide stopper	4 pcs	4 pcs
I Rubber buffer	2 pcs	2 pcs
Cat. No.	406.70.022	406.70.031
Additional items	Cat. No.	
J Centre door stopper	406.70.970	



HAWA soft closing system, is shown on pages 12-13

HAWA-Dorado Mixfront double bottom guide channel

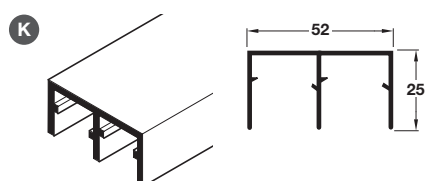

- > Pre-drilled for screw mounting, surface mounted
- > Silver anodised aluminium
- > Order qty: 1 pc

Item	2.5 m	3.5 m
K Double bottom channel	406.72.919	406.72.928