

PORTHOLE FRAMES, GLASS AND TAPE

The portholes shown on pages 106-107 have been assessed for use on fire doorsets with respect to BS EN 1634-1 and BS 476: part 22 - Report available on request.

How to order - Porthole frames, glass and tape


2

Door Accessories: Seals


	Example 1	Example 2	Example 3*
Select size of porthole required	Ø 350 mm	Ø 350 mm	Ø 350 mm
Select finish	SSS	SSS	SSS
Confirm door thickness	44 mm	44 mm	54 mm
Confirm door fire rating	non fire	FD30	FD60
Confirm door construction	Timber	Timber	Timber
Select glass	6.4 mm laminated	6 mm clear Fire	6 mm clear Fire
Glass circumference	1100 mm	1100 mm	1100 mm
Glazing tape thickness (10-6.4 mm/2=1.8 mm)	1.6 mm	1.6 mm	1.6 mm

- > How to order
- > If doors are 42 mm thick the glazing pocket is reduced to 8 mm, use 0.8 mm tape, if 46 mm thick, use 3.2 mm tape
- > *Special order only

	Porthole	Glass	Tape	Liner
Example 1	973.99.010	973.99.210	973.99.103 2200 mm required	-
Example 2	973.99.010	973.99.213	973.99.110 2200 mm required	973.99.120 1100 mm required
Example 3	973.99.010	973.99.213	973.99.111 2200 mm required	973.99.121 1100mm required
Circumference	Ø 250 - 785 mm	Ø 350 - 1100 mm	Ø 450 - 1415 mm	Ø 550 - 1729 mm

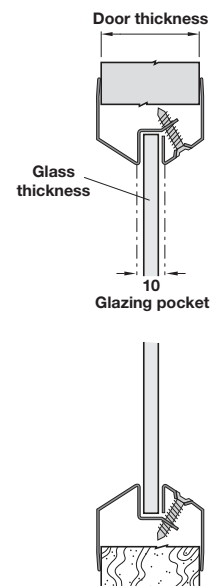

Security glazing tape

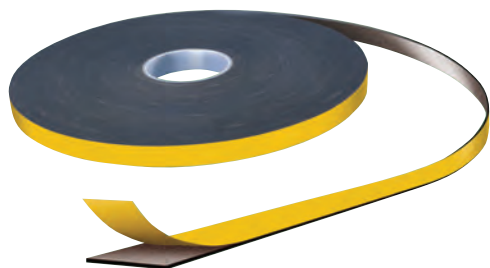

- > Double sided self-adhesive PVC foam
- > 9 or 12 mm width
- > 25, 33 or 40 m rolls
- > Order qty: 1 pc

Thickness x Width	Roll length	White	Black
1.5 x 9 mm	40 m	950.17.307	950.17.303
1.5 x 12 mm	40 m	950.17.317	950.17.313
2 x 9 mm	33 m	-	950.17.323
2 x 12 mm	33 m	-	950.17.333
3 x 9 mm	25 m	-	950.17.343
3 x 12 mm	25 m	950.17.357	950.17.353



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.