


Multipoint mortice cylinder 3 point lock, deadbolt, hookbolt



- > Latchbolt operated by lever handles. Deadbolt and hooks operated by lifting lever and the deadlocking by cylinder
- > Cases: Steel, BZP CR3 passivate, 14.5 mm thick
- > Front plate: Square, 1 piece. Steel, BZP CR3 passivate 2100/2250 mm x 16/20 mm wide
- > Keeps: Not included, order separately
- > Latchbolt: Brass. Reversible
- > Deadbolt: Brass. 22 mm throw
- > Hookbolts: Forged brass. 28 mm overall throw
- > Follower: 8 mm brass. For use with standard 92 mm unsprung lever handles
- > Not suitable for rebated doors
- > Designed to meet the requirements of PAS 23 and PAS 24
- > Order fixing screws separately
- > Order qty: 1 pc

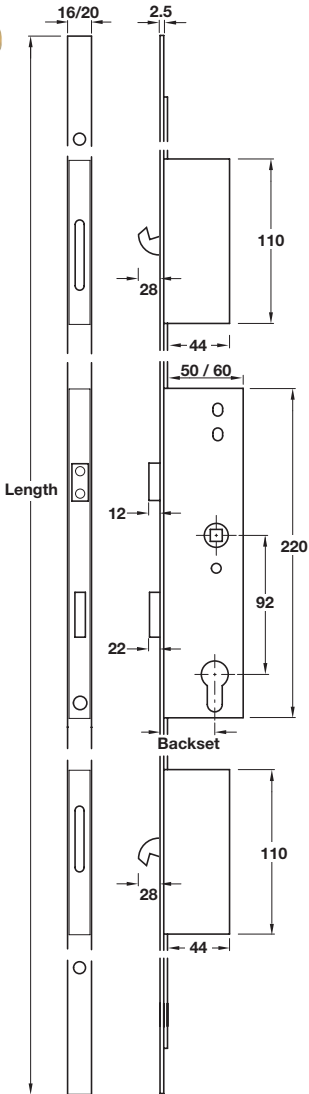

Length with shoot bolts added			
		Minimum	Maximum
Backset 35 mm			
2250 x 16 mm	911.50.805	1818 mm	2126 mm
2100 x 16 mm	911.50.780	2022 mm	2248 mm
2250 x 16 mm	911.50.781	2055 mm	2294 mm
Backset 45 mm			
2250 x 16 mm	911.50.806	1818 mm	2126 mm
2100 x 16 mm	911.50.782	2022 mm	2248 mm
2250 x 16 mm	911.50.784	2055 mm	2294 mm
2100 x 20 mm	911.50.783	Will not accept shoot bolts	
2250 x 20 mm	911.50.785	Will not accept shoot bolts	



Front plate length x width	Cat. No.
Backset 35 mm	
2250 x 16 mm	911.50.805
2100 x 16 mm	911.50.780
2250 x 16 mm	911.50.781
Backset 45 mm	
2250 x 16 mm	911.50.806
2100 x 16 mm	911.50.782
2250 x 16 mm	911.50.784
2100 x 20 mm	911.50.783
2250 x 20 mm	911.50.785



- > Keeps are shown on pages 45-46. Order cylinders separately, see pages 65-77
- > Optional shoot bolt engagement for additional security available, shown on page 47
- > Multipoint lock standard 92 mm unsprung lever handles are shown in Section 1 on pages 97-100



All moving parts should be lightly lubricated using a light non-acidic mineral oil (eg. "3 in 1"), twice per year and surface cleaned with a soft damp cloth. The locks may need to be adjusted and fixings tightened to ensure a satisfactory operation

TOH AH 2019, © Hafele U.K. Ltd 2019. Dimensional data not binding. We reserve the right to alter specifications without notice.