

XS13 Trimvent Select XS13 plastic slot ventilator





Vent




Canopy



- > Specially developed for Part F of Building Regulations Ventilation (England and Wales)
- > Deflects air up, down or both and straight
- > Use 13 mm high slot (see diagrams below)
- > Equivalent Area (EA) mm² 4400 and 5000
- > Sculptured finger recess
- > Vent and canopy supplied with screw covers
- > Comprises:
 - 1x vent
 - 1x canopy
- > Plastic
- > Tested in accordance with BS EN 13141:2004
- > Complies with BS 6375 part 2
- > Order qty: 1 set

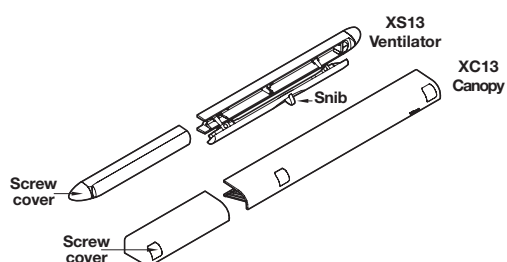


Slot detail and dimensions
411 mm long vent



497 mm long vent

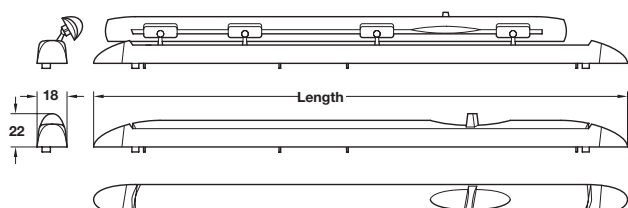

Vent

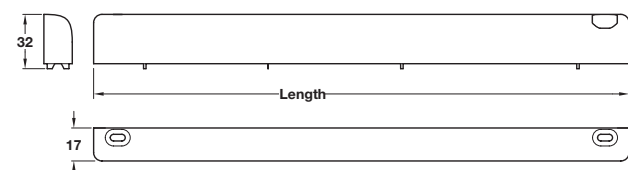

Canopy

Vent - 411 mm long, canopy - 411 mm long

	Vent	Canopy
Equivalent Area (EA) mm ²	4400	4400
Free Area (EA) mm ²	4241	5027
Length	411 mm	411 mm
Width	18.5 mm	17 mm
Projection closed/open	20/27 mm	32.5 mm
Fixing centres	387 mm	387 mm

Vent - 497 mm long, canopy - 497 mm long

	Vent	Canopy
Equivalent Area (EA) mm ²	5000	5000
Free Area (EA) mm ²	5213	6258
Length	497 mm	497 mm
Width	18.5 mm	17 mm
Projection closed/open	20/27 mm	32.5 mm
Fixing centres	473 mm	473 mm

Finish	White	Brown
Vent - 411 mm long, canopy - 411 mm long		
Cat. No.	975.00.307	975.00.301
Vent - 497 mm long, canopy - 497 mm long		
Cat. No.	975.00.317	975.00.311



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.