



LOOX5 12V LED 2168 FLEXIBLE STRIP LIGHT MONOCHROME, 8 MM



Aluminium profiles are available to order separately, shown from page **5.184**

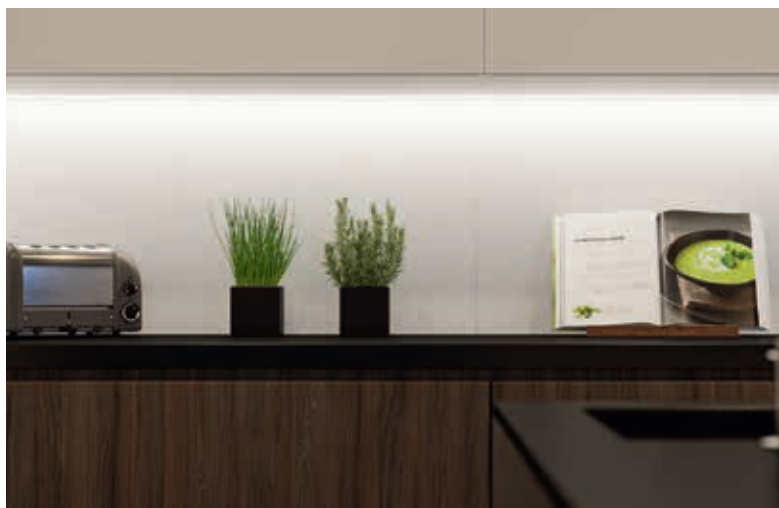

Loox5 12V LED 2168 flexible strip light, 6.0W/m, 8 mm width

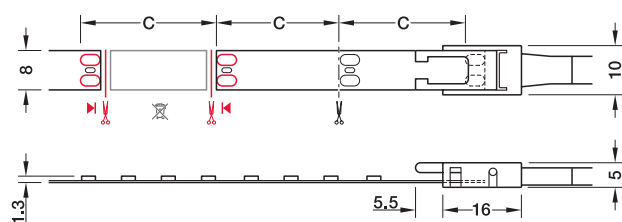

C = section length = 25 mm

2700 K	3000 K	4000 K	5000 K		120°	
2145 lx	2250 lx	2300 lx	2300 lx			250 mm
900 lx	940 lx	950 lx	955 lx			500 mm
480 lx	505 lx	510 lx	515 lx			750 mm
300 lx	310 lx	320 lx	320 lx			1000 mm

Illuminance value in lx applies to 1 m strip length, without diffuser

- > High luminous efficacy
- > Equipped with high-quality CREE LEDs
- > For surface mounting, self adhesive, 5 or 50 m length
- > Can be shortened every 25 mm
- > Voltage: 12V. Wattage: 6.0W per metre
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: L80/B10 >50,000 h, st. L70/B50 >80,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)



- > Maximum recommended strip light length for optimum visual light output: 3.5 m
- > Maximum strip length (visual) describes a strip section with a visually imperceptible drop in luminous flux of max. 30%
- > Please note: A strip section with a new power supply that follows immediately is noticeably brighter
- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Lead must be ordered separately, shown on page **5.171**

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	6.0W per metre			
Energy efficiency:				
Number of diodes:	160 per metre			
Light output (Lm/m):	920	970	1000	1040
Efficacy (Lm/W):	153	162	167	173
CRI Ra / R9:	92 / >50			

5 12V




Length	2700 K	3000 K	4000 K	5000 K
5 m	833.74.175	833.74.176	833.74.177	833.74.178
50 m	833.74.265	833.74.266	833.74.267	833.74.268

ARTICLES REMOVED FROM PAGE

833.74.362 DISCONTINUED - REPLACED BY **833.74.175**
 833.74.363 DISCONTINUED - REPLACED BY **833.74.176**
 833.74.364 DISCONTINUED - REPLACED BY **833.74.177**
 833.74.365 DISCONTINUED - REPLACED BY **833.74.178**

YOU ALSO NEED:



PAGE AMENDED
21.03.25/1