


IXCONNECT VARIANTOOL-N DRILLING JIG


3

Hand Tools & Jigs

- > For drilling Ø 3 or 5 mm holes consistently at 32 mm intervals (Ø 8 mm and 10 mm dowel holes, not included)
- > The jig allows for an inset distance from the front carcass edge of 37 mm and from the back edge of 69 mm
- > Integral sliding positioning tabs ensure consistent drilling locations
- > An ideal addition to the other Unitool drilling jigs, for drilling series of holes in a line or groups of holes according to System Varianta 32

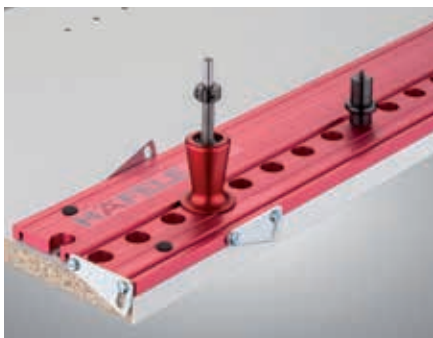

The drilling jig is moved and fixed with the locating pin for longer rows of series drilled holes

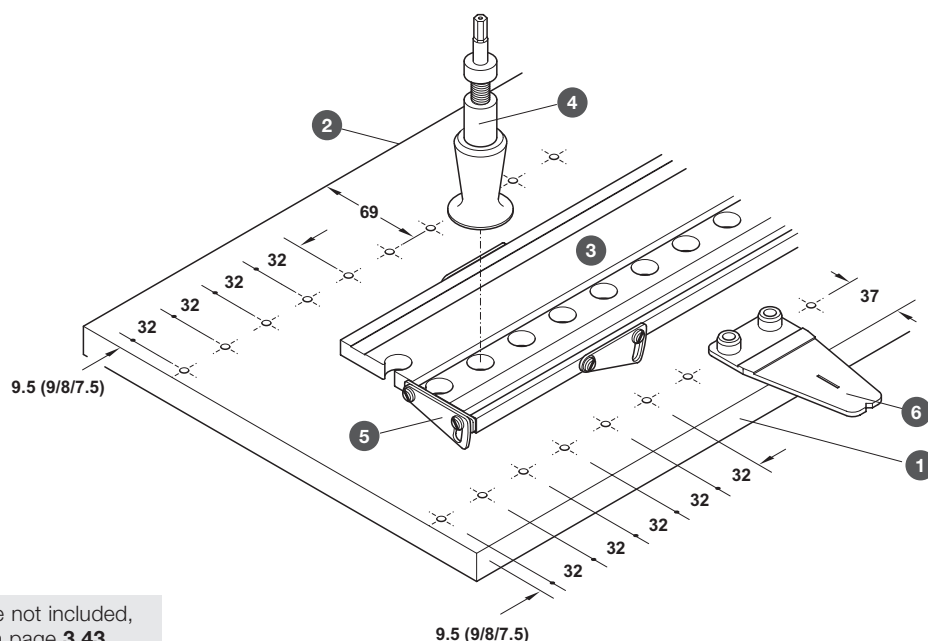


- 1 Front edge of cabinet
- 2 Rear edge of cabinet
- 3 Profiled aluminium rail
- 4 Depth gauge (not included)
- 5 Stop plate
- 6 Marking gauge (not included)



Depth and marking gauge are not included, additional parts are shown on page 3.43

Variantool-N drilling jig

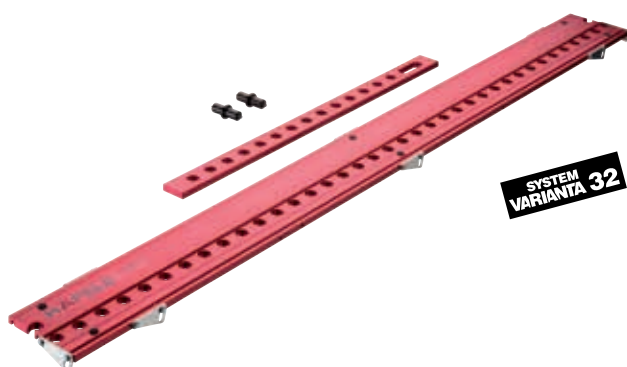

- > Set consists of:
 - 1x Rail, 560 or 1167 mm length, profiled aluminium with non slip coating, for 37 holes at 32 mm intervals (other system intervals available on request)
 - 8x Adjustable stop plates for edge distances of 37 and 69 mm
 - 2x Locating pins for Ø 3 and Ø 5 mm holes
 - 1x Surface drilling jig, 550 x 35 x 10 mm
- > Order qty: 1 set



Variantool-N drilling jig with profiled rail:	Cat. No.
560 x 106 x 10 mm	001.27.017
1167 x 106 x 10 mm	001.27.016



- > Red jig basic jig and supplementary jigs for Minifix 12 and 15 housings, Rafix and Maxifix are shown on pages 3.36-3.40
- > Unitool drilling jig for Minifix 12 and 15 housings, Rafix, Pushfix, Onefix TAB and TAB 18 connectors can be found on pages 3.44-3.45

PAGE AMENDED
28.02.24/1