

Häfele Dialock EFL 1 furniture locks (mains-operated) - Ordering product components

Required number of furniture locks, cable length 3 m EFL 1	Multi-lock adapter	Power supply unit	6-way distributor	Furniture terminal	Antenna, cable length 3 m
MLA 8	PS 1	CC 140	FT 200	DFANT 2	
					
237.56.000/004 Page 8.122	237.59.030 Page 8.127	237.58.180 Page 8.121	823.28.780 Page 8.123	237.59.010 Page 8.119	237.59.061 Page 8.121

Continue to
Page 8.132
Programming and user keys



Keyed alike hinged doors and flaps

1-8	1	-	-	1	1
9-13	1	-	1	1	1
14-16	2	-	-	1	1
17-24	3	-	-	1	1



Keyed to differ hinged doors and flaps

2-8	1	-	-	1	1
-----	---	---	---	---	---

Dialock EFL 1 Furniture lock case

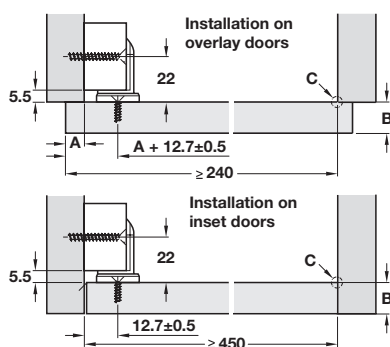

A = door overlay, B = door thickness,
C = theoretical pivot point



- > Application: For use in furniture and office equipment, such as roller shutters, flaps, hinged doors and drawers
- > For door widths: min. 450 mm for overlay doors, min. 240 mm for inset doors
- > Operation: Electro-mechanical lock. Fail locked, i.e. locks when no power. Locking bolt is floating to compensate for any tolerances
- > Technical data:
 - > Power supply: 12 V DC (Direct Current)
 - > Continuous current consumption: 50 mA
 - > Tensile load: >200 N (acc. to DIN 68 852)
 - > Monitored version: Contact rating, 5V 10mA maximum
- > Comprises:
 - 1x Lock case, nickel-plated zinc alloy
 - 1x Fixing plate, nickel-plated zinc alloy
 - 1x Locking bolt, grey plastic
 - 1x AMP plug connector
 - 1x Connecting cable, 1 or 5 m lengths
- > Order qty: 1 pc

With cable length	Unmonitored	Monitored
1 m	237.56.000	237.56.030
5 m	237.56.004	237.56.034



For help, advice and ordering of our full range of DIALOCK access control systems please get in touch with our Project Team, 0800 171 2907 or estimating@hafele.co.uk