

Free Fold lift up flap fittings

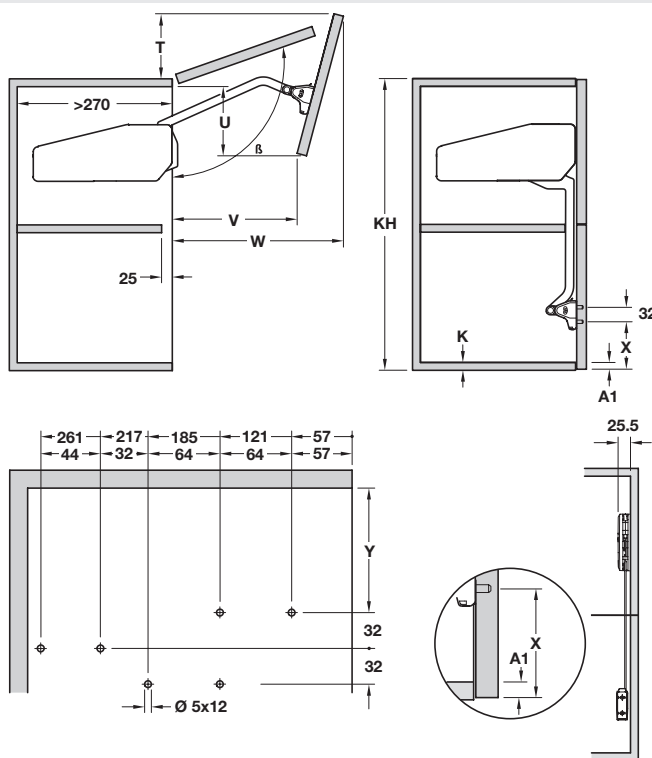


Photo shows white cover cap -
grey cover cap is included

- > For two-piece flaps - wood or with aluminium frame from 45 mm
- > Set consists of:
- > 1x Double flap lift up fitting
- > Height and side adjustment ± 3 mm, holding, opening and centre pull adjustment facility
- > Fitting: nickel-plated steel, cover cap: grey plastic
- > Order qty: 1 set



White or anthracite cover cap, to replace grey cover cap included, is available to order separately; see page 9.221



Set the cordless drill on low speed torque. Ensure the same power adjustment on both sides (left and right)

**YOU
ALSO
NEED:**



HINGES & BRACKETS
Page 9.95, 9.215

OPTIONAL ACCESSORIES
Page 9.215, 9.221-223



Cabinet height	Flap weight	Grey
480-530 mm	4.9-10.2 kg	372.38.512
	9.3-15.9 kg	372.38.513
520-590 mm	2.4-4.8 kg	372.38.520
	4.8-9.0 kg	372.38.522
580-650 mm	7.8-15.2 kg	372.38.523
	4.0-8.5 kg	372.38.532
650-730 mm	6.8-12.5 kg	372.38.533
	2.0-3.7 kg	372.38.540
710-790 mm	3.7-7.4 kg	372.38.542
	7.0-11.8 kg	372.38.543
770-840 mm	10.2-17.2 kg	372.38.544
	3.6-6.2 kg	372.38.552
840-910 mm	6.1-10.8 kg	372.38.553
	8.5-14.4 kg	372.38.554
	5.1-9.8 kg	372.38.563
	7.5-14.1 kg	372.38.564
	4.7-8.9 kg	372.38.573
	6.9-12.2 kg	372.38.574

Installation dimensions (mm)

KH	P°	Q	R	S	T	U	V	W
450-480 mm								
480-530 mm	107-96°	1.1	426	328	100-37	100-55	203-186	328-370
520-590 mm	107-93°	1.1	466	347	106-23	112-184	213-190	347-401
580-650 mm	108-95°	1.2	589	377	119-40	126-197	227-207	375-430
650-730 mm	107-94°	1.2	664	409	124-38	147-224	238-215	411-470
710-790 mm	108-95°	1.2	736	439	136-46	161-233	250-219	439-500
770-840 mm	108-95°	1.0	644	467	146-43	179-223	267-200	466-527
840-910 mm	108-98°	1.2	882	501	154-70	195-248	272-231	502-559
910-970 mm	107-98°	1.1	865	533	160-78	214-246	282-225	536-588
960-1010 mm	107-100°	1.1	915	557	170-99	228-251	295-240	560-605
1000-1040 mm	107-102°	1.1	954	576	177-120	239-256	306-256	578-616