

FREE SWING LIFT-UP FLAP FITTING

For flaps made from wood, glass or with aluminium frame.

9

Furniture Hinges and Flap Fittings: Flap Fittings and Stays

- > Ideal for large flaps
- > Swivels around cornice profiles and surface mounted lights
- > Full access to the cabinet contents
- > Stylish and compact design
- > Minimum opening resistance, multi-position stop function and integrated soft opening and soft closing mechanisms for extremely pleasant operating feeling
- > Rational and quick installation thanks to pins, pre-mounted Euro screws and quick fixing system of the front panel and cross bar




Highest operating convenience




- > Minimum opening resistance
- > Flap locks in any position (multi-position stop)
- > Smooth, soft closing movement
- > Soft opening and soft closing mechanisms


Maximum flexibility

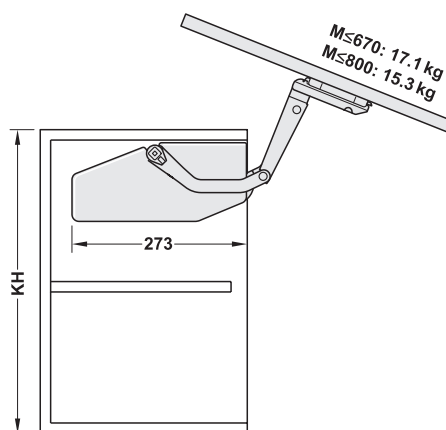

Side space requirement




Quick fixing system

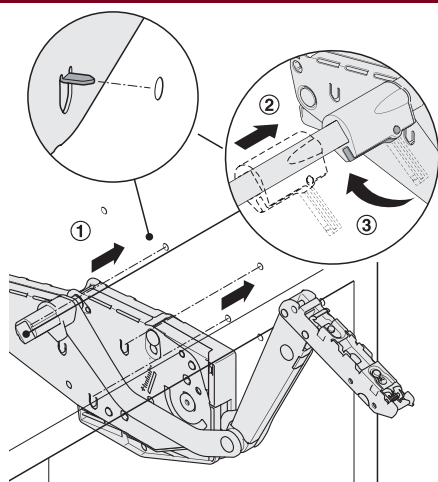

- 1 Plug fit fitting onto pre-drilled side panel, tighten Euro screws that were pre-mounted in the factory
- 2.-3. Insert cross bar and secure with the sleeves
4. Surface mount front panel and engage

Power adjustment of fitting

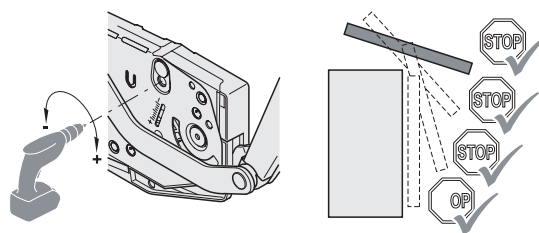

Insert PZ2 drive all the way into the opening.

Set the cordless screwdriver on low speed torque. Ensure the same power adjustment on both sides (left and right).

Free Swing swing up front fitting

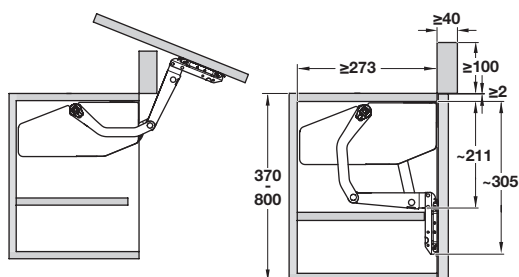


Photo shows white cover cap - grey cover cap is included



White or anthracite cover cap, to replace grey cover cap included, is available to order separately; see page 9.221

- > For one-piece flaps made from wood, glass or with aluminium frame
- > Integrated soft close
- > Set includes:
 - 1x Parallel lift up front fitting
 - 2x Cover caps
 - 2x Clip-on brackets for wooded flaps or flaps with wide aluminium frame
 - Installation instructions
- > Height and side adjustment ± 1.5 mm, tilting angle $\pm 1.5^\circ$, holding power and opening angle adjustment facility
- > Requires 1x cross rail, see below
- > Fitting: nickel-pleated steel, cover cap: grey plastic
- > Order fixing screws separately
- > Order qty: 1 set



Model	Weight range	Grey
S1	1.8-4.0 kg	372.34.500
S4	3.0-6.5 kg	372.34.501
S6	5.3-11.3 kg	372.34.521
S8	7.0-15.9 kg	372.34.512
S9	8.0-17.1 kg	372.34.522

Sample measurements table to choosing model

Model	S1	S2	S3	S4	S5	S6	S7	S8	S9
Cabinet height	Flap weight (kg)								
370-500 mm	370 mm	1.8-4.0	-	-	3.4-6.5	-	-	5.2-10.3	-
	400 mm	1.8-3.9	-	-	3.3-6.3	-	-	5.0-10.0	-
	450 mm	1.8-3.7	-	-	3.2-6.1	-	-	4.8-9.4	-
	500 mm	1.8-3.5	-	-	3.0-5.8	-	-	4.5-8.9	-
500-670 mm	500 mm	-	2.5-5.9	-	-	5.0-10.0	-	-	8.2-15.9
	550 mm	-	2.5-5.6	-	-	4.8-9.6	-	-	7.8-15.2
	600 mm	-	2.5-5.3	-	-	4.7-9.3	-	-	7.5-14.5
	670 mm	-	2.5-4.8	-	-	4.5-8.8	-	-	7.0-13.5
670-800 mm	670 mm	-	-	3.2-6.5	-	-	5.7-11.3	-	-
	700 mm	-	-	3.1-6.3	-	-	5.6-11.1	-	-
	750 mm	-	-	3.0-6.0	-	-	5.4-10.7	-	-
	800 mm	-	-	2.9-5.7	-	-	5.3-10.3	-	-

YOU ALSO NEED:



CROSS RAIL
Shown below




ALTERNATIVE MOUNTING BRACKETS
Page 9.220

OPTIONAL ACCESSORIES
Page 9.221-223

Cross rail



Installation

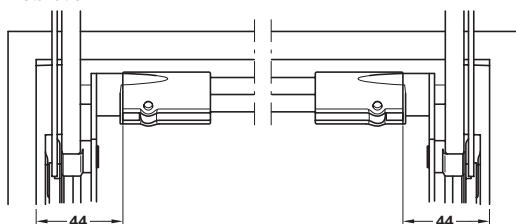

Cutting dimension = internal cabinet width - 88 mm

- > For use with all Free family flap fittings
- > For connecting both fitting components
- > Side panel thickness W: 16/19 mm
- > Silver coloured anodised aluminium
- > Order qty: 1 pc



Cabinet width	Length	Cat. No.
600 mm	474 mm	372.33.692
900 mm	774 mm	372.33.694
1200 mm	1074 mm	372.33.696
1800 mm	1674 mm	372.33.698