

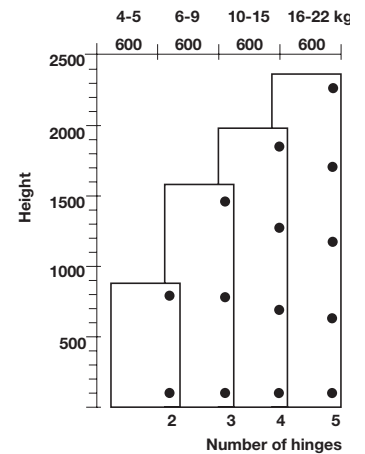


HÄFELE 270° HINGE AND MOUNTING PLATES




- > Opening angle 270°, Ø 35 mm cup
- > Screw fixing cup
- > For door thicknesses up to 22 mm
- > Full overlay mounting zinc cup and hinge arm
- > Order fixing screws separately
- > Order qty: 1 pc




Key-hole system

- Refrigerator hinge
- Special hinges

The hinge is assembled on the mounting plate inserting the fixing screw on the appropriate hole on the hinge arm. After adjusting the door depth, the mounting procedure is finished by tightening the fixing screw.

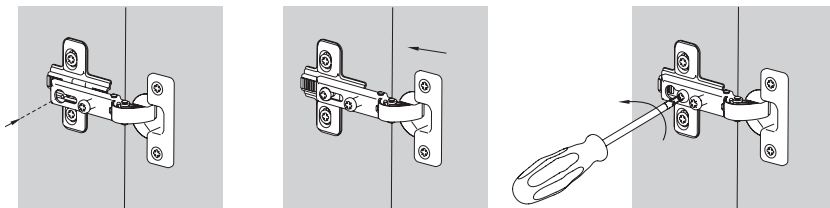

Full overlay mounting



Side panel thickness mm

Side panel thickness mm	18	19	20	21	22	23	24	
Side panel overlay mm	0	1	2	3	4	5	6	0
Mounting plate distance mm								



Fixing

Keyhole fixing

Screw fixing

312.50.600

YOU ALSO NEED:



MOUNTING PLATES
Shown below




FIXING SCREWS
Pages 13.6-12


OPTIONAL ACCESSORIES
Pages 9.126-137

Keyhole fixing mounting plate for 270° hinge only

For Hospa screws



With pre-mounted Euro screws



- > Hospa screw fixing or with pre-mounted Euro screws
- > Nickel-plated zinc
- > Order fixing screws separately for Hospa screw fixing version
- > Order qty: Multiples of 10 pcs



Height

Pre-mounted Euro screws

Hospa screws

0 mm

312.56.610

312.56.600