

GRASS TIOMOS 95° SOFT CLOSE HINGES

9

Furniture Hinges and Flap Fittings: Hinges




- > For up to 28 mm thick doors - for door thicknesses 29 mm and above, a trial fitting is recommended
- > Opening angle 95°, Ø 35 mm cup
- > Up to 24 mm overlay using full overlay plus hinge (see page 9.55)
- > Available with or without integrated soft close
- > Screw fixing, dowel or Impresso (quick fix) fixing cup
- > Click on arm
- > Full overlay and full overlay plus mounting has steel cup and hinge arm. Half overlay and inset mounting has steel cup and zinc alloy arm
- > Tiomos Night, anthracite finish, also available
- > Order fixing screws separately
- > Order qty: 1 pc


Tiomos 95°

Door thickness mm	Distance to cup E mm				
	3.0	4.0	5.0	6.0	7.0
16	0.2	0.2	0.2	0.2	0.2
18	0.2	0.2	0.2	0.2	0.2
20	0.3	0.3	0.3	0.3	0.3
22	0.5	0.5	0.5	0.5	0.5
24	0.6	0.6	0.6	0.6	0.6
26	1.0	1.0	1.0	1.0	1.0
28	2.0	1.5	1.5	1.3	1.3
30	4.0	3.0	2.5	1.9	2.4
36	10.5	10.0	8.6	7.6	6.7
Minimum gap F					

Drilling pattern for cup fixing

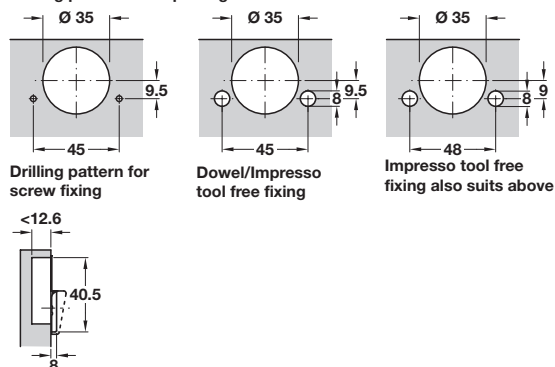

Grass Tiomos 95° concealed hinge, full overlay mounting



Application example with 2 mm mounting plate shown - see table opposite for details


Door overlay mm							
13	14	15	16	17	18	19	
		3	4	5	6	7	0
3	4	5	6	7			2
Distance to cup E mm				Mounting plate distance mm			



Screw fixing cup	Nickel-plated	Tiomos Night (anthracite)
With soft close	348.42.801	348.42.806
Without soft close	348.42.601	-
Impresso quick fixing cup		
With soft close	348.42.831	-
Dowel fixing cup		
With soft close	348.42.811	-

PAGE AMENDED
18.10.24/1

Grass Tiomos 95° concealed hinge, half overlay/twin mounting




Application example with 2 mm mounting plate shown - see table opposite for details

Door overlay mm							
6.5	7.5	8.5	9.5	10.5	11.5	12.5	
		3	4	5	6	7	0
3	4	5	6	7			2
Distance to cup E mm				Mounting plate distance mm			



Screw fixing cup	Nickel-plated	Tiomos Night (anthracite)
With soft close	348.42.802	348.31.826
Without soft close	348.34.602	-

Grass Tiomos 95° concealed hinge, inset mounting




Application example with 2 mm mounting plate shown - see table opposite for details

Door overlay mm							
	4	3	2	1	0		
				3	4		0
		3	4	5	6		2
Distance to cup E mm				Mounting plate distance mm			



Screw fixing cup	Nickel-plated	Tiomos Night (anthracite)
With soft close	348.42.803	348.42.809
Without soft close	348.34.603	-

Grass Tiomos 95° concealed hinge, full overlay plus



Application example with 2 mm mounting plate shown - see table opposite for details

Door overlay mm							
16	17	18	19	20	21	22*	
		3	4	5	6	7	0
3	4	5	6	7			2
Distance to cup E mm				Mounting plate distance mm			

*door overlay for 24 mm, use mounting plate 348.38.560 on page 9.82



Screw fixing cup	Nickel-plated
With soft close	348.42.800
Without soft close	348.34.600



YOU ALSO NEED:

MOUNTING PLATES
Pages 9.80-82

FIXING SCREWS
Pages 13.6-12

OPTIONAL ACCESSORIES
Pages 9.87-88, 9.126-137

Grass Tiomos cruciform mounting plate, 4 point fixing



- > For TIOMOS click on fixing hinges only
- > Hospa screw fixing
- > Two part plate with ± 2 mm height adjustment via worm screw
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc

BEST SELLER



Height	0 mm	2 mm
Hospa screw	348.38.511	348.38.512



A wider range of mounting plates are shown on pages 9.80-82

PAGE AMENDED
18.10.24/1