




GRASS TIOMOS PIE-CUT CORNER HINGE

9




- > For connecting two corner cabinet doors
- > Ø 35 mm cup
- > For door thickness up to 24 mm (factory setting is for 19 mm door thickness for 3.5 m cup distance)
- > Low cup drilling depth of 11.8 mm
- > Only available without soft close
- > Screw fixing cup
- > Click on arm
- > 3-dimensional adjustment with appropriate mounting plate
- > Zinc alloy cup and hinge arm
- > Note: Dimensions in drawings and tables are calculated using factory settings and for mounting plate distance 0 mm
- > Order fixing screws separately
- > Order qty: 1 pc



Drilling pattern for cup fixing

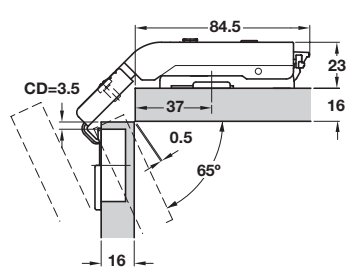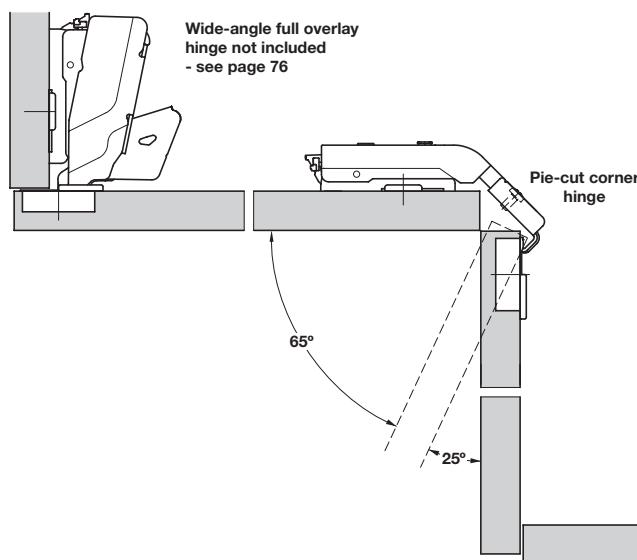

Mounting plate height 0 mm




Mounting plate height 0 mm

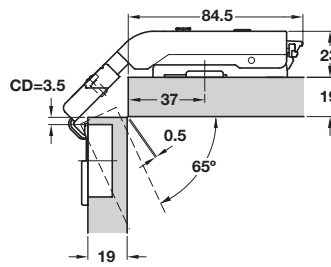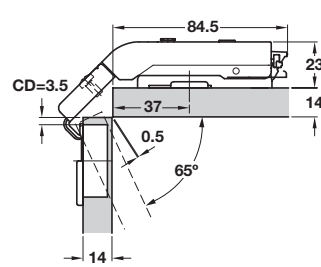19 mm door thickness (factory setting)
Mounting plate height 0 mm

Mounting plate height 0 mm

Grass Tiomos PCC Pie-Cut corner hinge, with full-cup drill hole



Hinge arm adjustment:

- 1. Continuous side adjustment ± 2 mm
- 2. Continuous depth adjustment via worm gear $+3/-2$ mm
- 3. Door thickness 14 - 24 mm (factory setting 19 mm)

Hinge adjustment by means of mounting plate

CD = Cup Distance

GRASS
25
YEAR
WARRANTY

FIXINGS
REQUIRED
HOSPA
Ø 3.5

Soft close	Screw fixing
Without	348.29.600

YOU ALSO NEED:

✓

MOUNTING PLATES

Pages 9.80-82

✓


FIXING SCREWS

Pages 13.6-12

OPTIONAL ACCESSORIES

Pages 9.87-88, 9.126-137

Grass Tiomos cruciform mounting plate, 4 point fixing

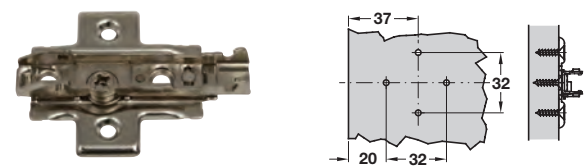

- > For TIOMOS click on fixing hinges only
- > Hospa screw fixing
- > Two part plate with ± 2 mm height adjustment via worm screw
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc

BEST
SELLER

GRASS
25
YEAR
WARRANTY

FIXINGS
REQUIRED
HOSPA
Ø 3.5

➔

A wider range of mounting plates are shown on pages **9.80-82**

Height	Hospa screw
0 mm	348.38.511

TCH TECHNOLOGY 2023, © Häfele U.K. Ltd 2023. Dimensional data not binding. We reserve the right to alter specifications without notice.