


HAWA-CLIPO 16 H MIXSLIDE SLIDING DOOR SYSTEM




1

High quality straight sliding top hung cupboard door gear for domestic or light-duty commercial furniture. Concealed fittings. Optional soft close.

- > HAWA-CLIPO 16 H Mixslide
- > Range:
 - Maximum door weight **16 kg**
 - Max. door height **1400 mm**
 - Max. door width **1000 mm**
 - For door thickness **16 / 19 mm**
- > Fittings are supplied in sets for 2 doors
- > Choice of three types of top track installations
- > Height adjustment +2/-1 mm on running gear

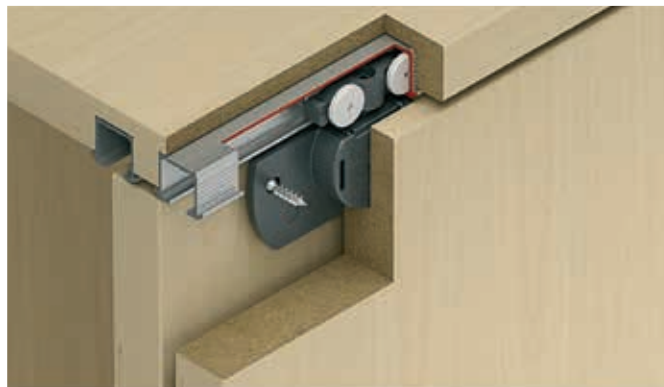


Installation bottom guide





Door overlap





Drilling diagram





Installation soft close



Tracks and fitting sets must be ordered separately, shown on page 1.9

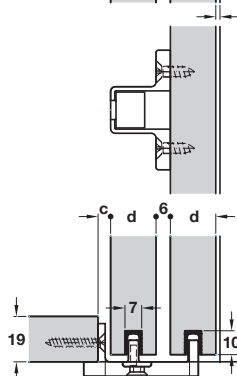


Door thickness 16 mm

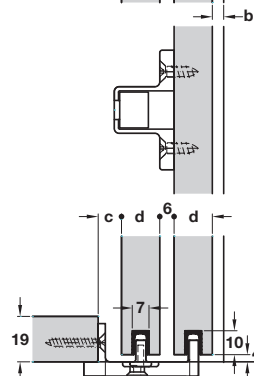

Door thickness 19 mm

Choice of single track:
Screw fixing in groove
Fit in groove and fix with swivel lug

HAWA-CLIPO 16 H Mixslide tracks and channels

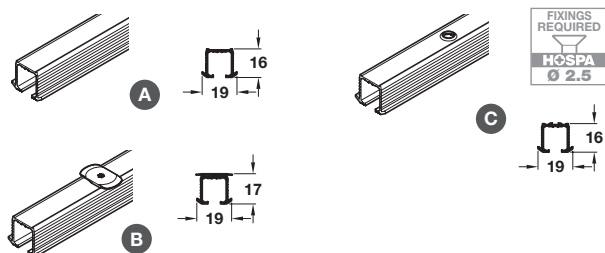

> Top track groove mounted, with different fixing options:

A Top track, for gluing into groove, for min. 19 mm wood thickness, bright aluminium


B Top track, swivel lug soffit fixing at 100 mm intervals, for min. 19 mm wood thickness, not suitable for hardwood or MDF, bright aluminium

C Top track, with screw holes, for soffit fixing into a groove, for min. 30 mm wood thickness, bright aluminium

> Order qty: 1 pc

Length	2.5 m	3.5 m
A Top track, glue fixing	405.87.052	405.87.053
B Top track, swivel lug fixing	405.87.062	405.87.063
C Top track, screw fixing	405.87.072	405.87.073

HAWA-CLIPO 16 H Mixslide fitting set for two doors

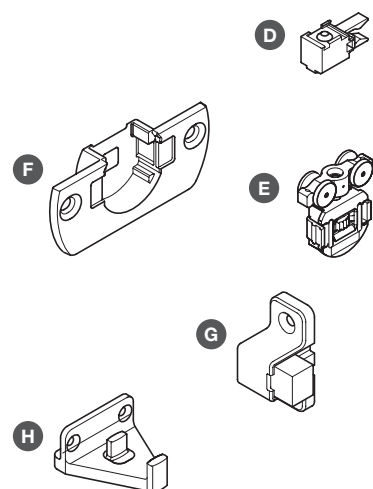

> Fitting set includes:

D Track stopper, for top track, grey plastic

E Running gear, for sliding into housing, height adjustable +2/-1mm, anthracite plastic

F Housing for groove mounting in top edge of door, screw fixing, anthracite plastic

G Door buffer, screw fixing, grey plastic


H Bottom guide, press-fit, anthracite plastic

> Order qty: 1 set



Fitting set	For 2 doors
D Track stopper	2 pcs
E Running gear	4 pcs
F Housing	4 pcs
G Door buffer	1 pc
H Bottom guide	1 pc
Cat. No.	405.82.118

HAWA-CLIPO bottom guide profile



> Ribbed for press-fit installation


> For use with guide H

> Anthracite plastic

> Order qty: 1 pc

Length	2.5 m	3.5 m
I Bottom guide profile	405.98.516	405.98.525

HAWA-CLIPO top track end caps




> End caps for top track

K End cap, screw fixing, grey plastic

> Order qty: 1 pc

Item	Cat. No.
K End cap, screw fixing	405.83.181

HAWA-CLIPO Inside soft close set for two doors



> Set includes 2 soft close mechanisms and 2 stoppers

> Grey plastic

> Order qty: 1 set



- > Min. door width 260 mm for when using 1 soft close
- > Min. door width 480 mm for when using 2 soft close

Item	For 2 doors
L Soft close	405.10.070