


SLIDO D-LINE43 80M SLIDING DOOR SYSTEM

Allows wall mounted wooden doors to slide across openings as if they were floating, unique design means all tracks and fixings are hidden. Suitable for residential or commercial applications such as offices, meeting rooms or hotels.

2


Sliding & Folding Door Systems For Architectural Applications: Sliding Interior Doors

- > Slido D-Line43 80M
- > Range:
 - Max. door weight **80 kg**
 - For door width **800-1800 mm**
 - Min. door thickness **30 mm**
 - Door to wall **+ 4 mm** (adjustment on both sides, for compensating uneven walls)
 - Height adjustment **± 2 mm**
- > Includes soft closing mechanism
- > Top track can be recessed into the door for a wall to door clearance of 12 to 22 mm or face fixed with a clearance of 32 mm for skirting boards

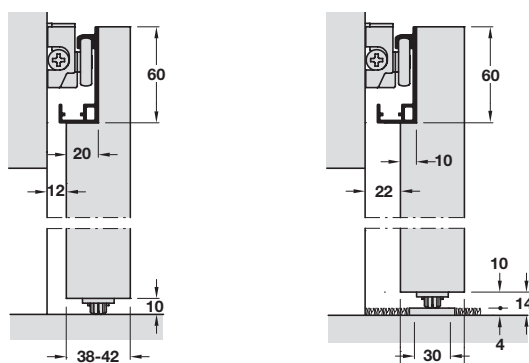


Door clearance 12 mm

Door clearance 22 mm with running track

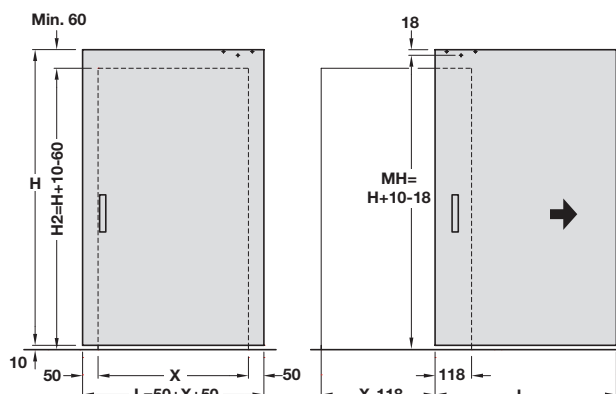


Cut-out dimensions

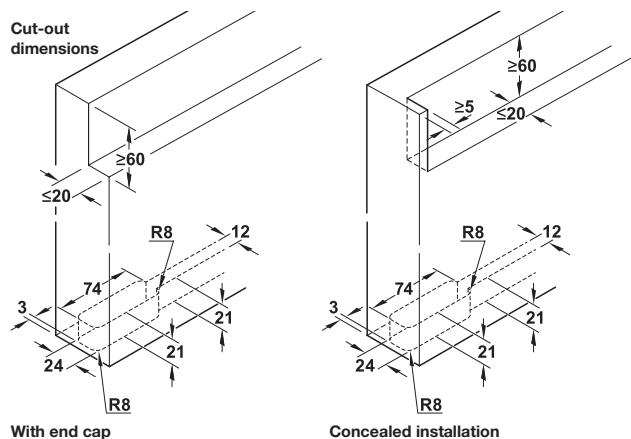

With end cap

Concealed installation

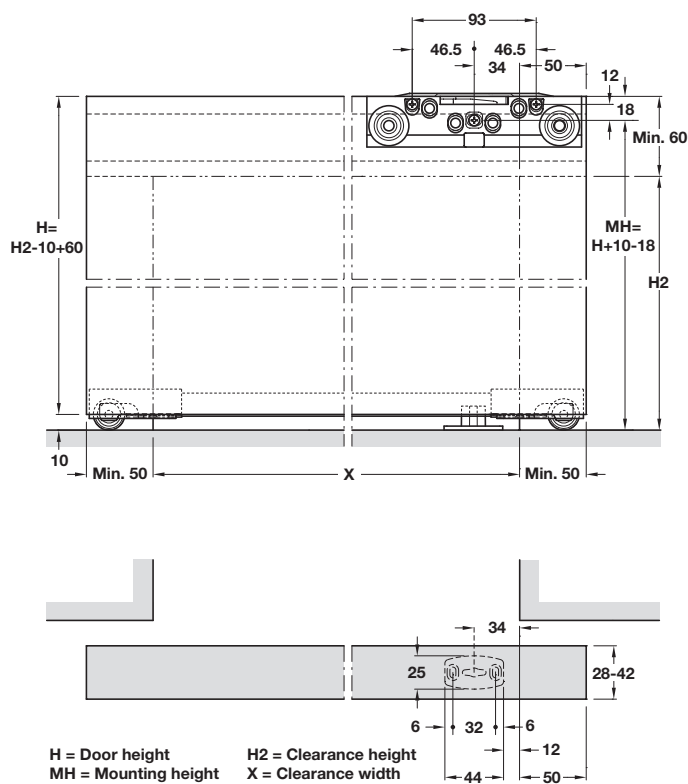


H = Door height
MH = Mounting height
H2 = Clearance height
X = Clearance width



Not suitable for bi-parting doors

Slido D-Line43 80M complete fitting set

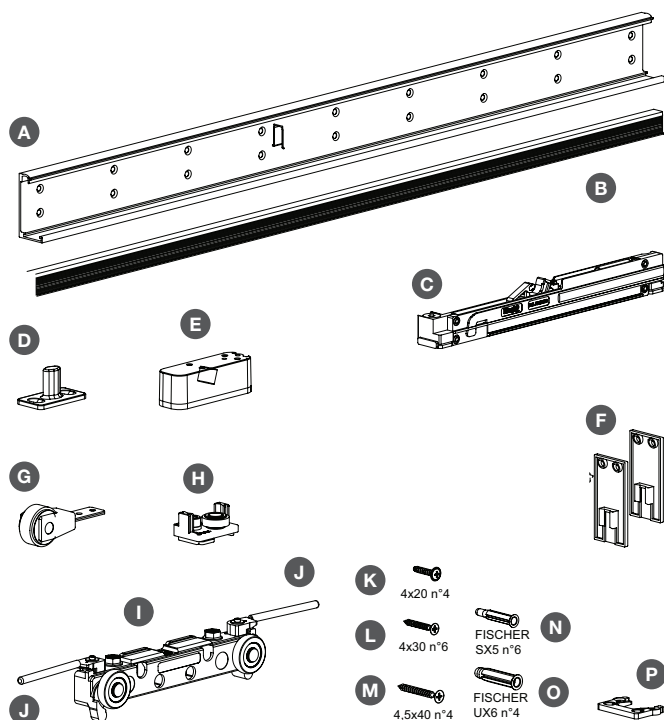

- > Fitting sets for one door:
- A Rail, 1100 or 1800 mm length, graphite black anodised
 - B Top running gear, wall mounted
 - C Soft close, plastic housing
 - D Guide channel, grey plastic
 - E Guide
 - F Bottom roller, grey plastic housing
 - G End caps, 1 pair black, 1 pair silver coloured
 - H Distance roller
 - I Distance plates, 3x 1 mm, 3x 2 mm and 3x 3 mm
- > Order qty: 1 set




Fitting sets for 1 door	1100 mm	1800 mm
A Rail	1 pc	1 pc
B Top running gear	1 pc	1 pc
C Soft close	2 pcs	2 pcs
D Guide channel	1 pc	1 pc
E Guide	1 pc	1 pc
F Bottom roller	1 set	1 set
G End caps	1 set	1 set
H Distance roller	2 pcs	2 pcs
H Distance plates	1 set	1 set
Cat. No.	940.59.008 	940.59.009



The bottom rollers need to run on a solid floor, if carpet is present then a running track strip must be used, shown below

Running track for soft floors



- > Silver coloured anodised aluminium
- > Order qty: 1 pc



Length	Cat. No.
2200 mm	940.59.802
3600 mm	940.59.803



Most of the products you will find in this Directory are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.