


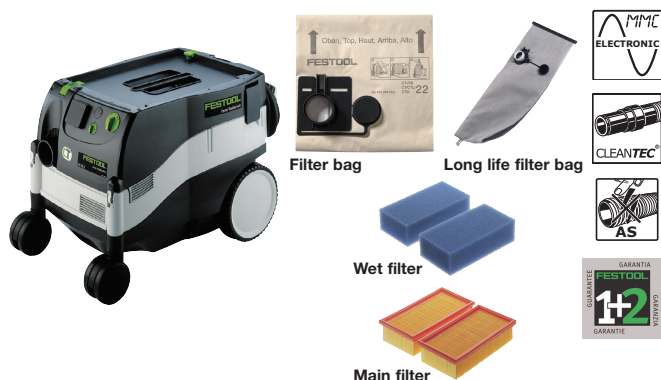

A Festool Cleantec CT 22 E mobile dust extractor

- Electronic control for continuously variable suction force
- Integrated electric socket with automatic electronic on/off switch
- Optimal safety when moving on an uneven surface due to robust chassis with large wheels and castors
- Tilt protection due to long wheelbase and wide axles
- 2 integrated brakes
- Anti-static function prevents charging with static electricity
- For **NON** hazardous dusts
- 22 litre drum capacity
- Systainer prot on top of machine
- **Supplied with:**
 - Cleantec CT 22 E mobile dust extractor
 - Filter bag (fitted)
 - Suction hose, Ø 27 mm, 3.5 m long (with anti-static function)

Technical data	
Power consumption	350 – 1200 W
Electric socket output	max. 2400 W
Volume flow	max. 3800 l per minute
Suction pressure	max. 23000 Pa (230 mbar)
Filter surface	14000 sq cm
Rubber-insulated power cable	7.5 m
Container/filter-bag volume	max. 22 l/20 l
Dimensions (L x W x H)	625 x 380 x 440 mm
Weight	12 kg
Cat. No.	008.53.409
Replacement parts	
Filter bag, 1 set = 5 bags	008.53.411
Long life filter bag	008.53.460
Main filter	008.53.470
Wet filter	008.53.480

Order qty: 1 pc



B Filter bag

- Suitable for model CTL 22 E SG GB

Cat. No.	
Filter bag	008.53.413

Order qty: 1 set (1 set = 20 bags)

Initial delivery

Pending Inspection by:

Goods In:

..... Date.....

Purchasing:

..... Date.....

Issue Approved by:

..... Date.....